

CATALOG NUMBER	TYPE
PROJECT	

LOW VOLTAGE XENON BUTTON LIGHT


HR-86



Surface Mounted



Recessed Mounted

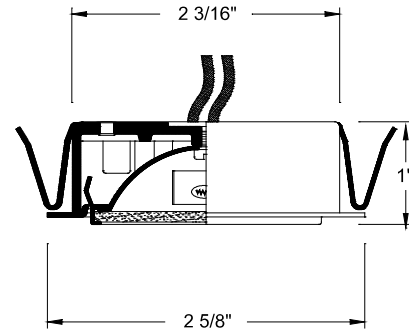

Ordering Matrix

Model	Series	Finish
[]	[]	[]
HR	86	BK BN CH DB WT CB

Ordering Example (model number – series – finish): HR-86-CH

Product Details

Description: Round surface or recessed mount button light suitable for wood surfaces such as cabinets and displays. May be used as surface mounted unit with the supplied outer housing or recessed by removal of the supplied outer housing.

Materials: Cast aluminum inner housing with a decorative outer steel housing included for surface mounting; outer housing is discarded when used as a recessed fixture. The socket is a bi-pin ceramic with 72" 20 gauge fiberglass lead wire. Supplied with bi-pin xenon lamp and clear glass lens.

Transformer: Remote class II required, ordered separately.

Lamping: Low voltage xenon bi-pin BP-20-12v (20W) included.

Cutout: 2 3/8"

Accessories: Frosted Lens available. Order code = LENS-45-FR

Listing: UL & CUL Listed. E204239

Specification Features

- Available in a choice of five abrasion resistant paint finishes;
BK = Black
BN = Brushed Nickel
CH = Chrome
DB = Dark Bronze
WT = White
CB = Copper Bronze
- Versatile choice for low profile source lighting. Not intended for ceilings.
- Dimmable with electronic low voltage dimmers.
- 5 year WAC Lighting product warranty.

Compatible Class II Transformers (sold separately):

<p>EN-1260-R2</p> <p>Electronic Transformer UL Listed Class II Component 120v input – 12v output 60 watt maximum</p>		<p>EN-1260-RB2</p> <p>Electronic Transformer UL Listed Class II 120v input – 12v output 60 watt maximum</p>		<p>EN-12300-R2</p> <p>Electronic Transformer UL Listed Class II 120v input – 12v output 300 watt maximum</p>	
---	--	--	--	---	--