


# HR-LED421

## 4" LEDme® Step Baffle Downlight Trim

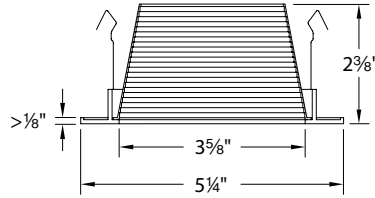

Fixture Type:

Catalog Number:

Project: \_\_\_\_\_

Location: \_\_\_\_\_

### PRODUCT DESCRIPTION

Round recessed trim with interior step baffle.  
For use with HR-LED418 series housings.

### FEATURES

- Less than 1/8" thick, super low profile die-cast aluminum trim
- Recessed depth from LEDs to trim edge is 2 3/8"
- Narrow flood beam spread
- Deep regression produces a very low glare with 40° cut-off angle
- Handles surfaces up to 3/4" thick
- 5 year WAC Lighting product warranty

### SPECIFICATIONS

**Construction:** Durable die-cast aluminum construction.  
Three heavy gauge retention clips firmly hold trim to housing.

**Light Source:** Utilizes six 3W LED's (included with housing).  
See individual housing for wattage rating.

**Finish:** Abrasion resistant powder coat painted or plated metal finish.  
Baffle is available in Black (BK) or White (WT).  
Trim is available in Black (BK), Brushed Nickel (BN), or White (WT).

**Standards:** UL & CUL Listed.

### ORDER NUMBER

Model #	Finish	Baffle/Trim
HR-LED421	BK/BN	Black/Brushed Nickel
	BK/WT	Black/White
	WT/WT	White/White

### FINISHES

BK/BN



BK/WT



WT/WT



**HR-LED421** –

Example: **HR-LED421-BK/WT**

### COMPATIBLE HOUSINGS

Model #	Installation Type	Color Temp	Lumens	CRI	Input	Wattage	Current	Dimensions
HR-LED418-NIC-W	New Construction – IC-Rated	3000K	380	80	120V 50/60Hz	11W max	450mA	L: 15-24 1/2" W: 6 3/4" H: 5 1/2"
HR-LED418-N-W	New Construction – Non-IC	3000K	480	80	120V 50/60Hz	18W max	700mA	L: 15-24 1/2" W: 6 3/4" H: 5 1/2"
HR-LED418-NIC-C	New Construction – IC-Rated	4500K	457	75	120V 50/60Hz	11W max	450mA	L: 15-24 1/2" W: 6 3/4" H: 5 1/2"
HR-LED418-N-C	New Construction – Non-IC	4500K	600	75	120V 50/60Hz	18W max	700mA	L: 15-24 1/2" W: 6 3/4" H: 5 1/2"
HR-LED418-RIC-W	Remodel – IC-Rated	3000K	380	80	120V 50/60Hz	11W max	450mA	L: 11 7/8" W: 6 3/8" H: 5 5/8"
HR-LED418-R-W	Remodel – Non-IC	3000K	480	80	120V 50/60Hz	18W max	700mA	L: 11 7/8" W: 6 3/8" H: 5 5/8"
HR-LED418-RIC-C	Remodel – IC-Rated	4500K	457	75	120V 50/60Hz	11W max	450mA	L: 11 7/8" W: 6 3/8" H: 5 5/8"
HR-LED418-R-C	Remodel – Non-IC	4500K	600	75	120V 50/60Hz	18W max	700mA	L: 11 7/8" W: 6 3/8" H: 5 5/8"

See individual housing spec sheets for complete information.

### WAC Lighting

www.waclighting.com

Phone (800) 526.2588 • Fax (800) 526.2585

### Headquarters/Eastern Distribution Center

615 South Street • Garden City, NY 11530

Phone (516) 515.5000 • Fax (516) 515.5050

### Western Distribution Center

168 Brea Canyon Road • City of Industry, CA 91789

Phone (800) 526.2588 • Fax (800) 526.2585