

2009 New Products



HR-LED85-DB LED Button Lights, in-cabinet application

2009 New Products

T5 Fluorescent Strip Light

- Great for use on wood cabinets, desks, shelves, bookcases and in cove applications
- Extruded aluminum body with snap-in polycarbonate lens
- Two interconnect receptacles for end to end connection of multiple units
- Power cord for portable applications
- Available in 5 lengths ranging from 12 ½" to 58 ¼"
- Includes power cord, I-connector and mounting accessories



Model	Finish	Watt	Color	Dimensions		
				L	W	H
BA-FT08	•	8W	3000K	12 ½"	7/8"	1 5/8"
BA-FT13	•	13W	3000K	21 5/8"	7/8"	1 5/8"
BA-FT21	•	21W	3000K	34 5/8"	7/8"	1 5/8"
BA-FT28	•	28W	3000K	46 ½"	7/8"	1 5/8"
BA-FT35	•	35W	3000K	58 ¼"	7/8"	1 5/8"

JUMPER CABLE

Model	Finish	Length
BA-FT-IC12	WT	12"
BA-FT-IC24	WT	24"
BA-FT-IC36	WT	36"

Allows the linking of two light bars in any direction using a single power connection.

Lamp, 6' power cord, I-connector and mounting accessories included.

Example: **BA-FT13-WT**

FLEXRAIL1™ LEDme™ Track Luminaires

- Sleek contemporary design and small size
- Energy efficient, low voltage LEDs
- 50,000 hour potential life
- Die cast aluminum thermal management
- Strong projected light output with no projected heat
- 9W, 4500K LED unit performs like a 50W PAR20/30 lamp
- 18W, 4500K LED unit performs like a 75W PAR30 lamp




Model	Finish		Color	Beam	LED	Dimensions		
	DB	PT				L	W	H
HM1-9S-WW	•	•	3000K	S 10°	3 x 3W	2 3/4"	3"	6 1/8"
HM1-9F-WW	•	•	3000K	F 25°	3 x 3W	2 3/4"	3"	6 1/8"
HM1-18S-WW	•	•	3000K	S 10°	6 x 3W	3 1/2"	3 3/4"	7 1/4"
HM1-18F-WW	•	•	3000K	F 25°	6 x 3W	3 1/2"	3 3/4"	7 1/4"
HM1-9S-CW	•	•	4500K	S 10°	3 x 3W	2 3/4"	3"	6 1/8"
HM1-9F-CW	•	•	4500K	F 25°	3 x 3W	2 3/4"	3"	6 1/8"
HM1-18S-CW	•	•	4500K	S 10°	6 x 3W	3 1/2"	3 3/4"	7 1/4"
HM1-18F-CW	•	•	4500K	F 25°	6 x 3W	3 1/2"	3 3/4"	7 1/4"

Lamp included. See p.193-194 of 25th Anniversary Catalog for lens options.

Example Order: **HM1-18F-WW-DB**

Finish Key: DB – Dark Bronze, PT – Platinum



2009 New Products

LEDme™ Button Light in Dark Bronze Finish

- Energy efficient, low voltage LEDs
- 50,000 hour potential life
- Recessed or surfaced mounting options
- Ideal for kitchen counters, curios, etageres and cabinets
- Thermally efficient for illuminating sensitive perishables and UV sensitive apparel, artwork and collectables



Surface Mounted




Recessed Mounted

Model	Finish	Watt	Color	Lumens	Dimensions	
	DB				Ø	H
HR-LED85	•	3 × 1W	3000K	180	2 1/4"	3/4"

Model shown: **HR-LED85-DB**

LEDs included.



LEDme™ Button Light Retrofit Housing

- Use to replace recessed HR-88 halogen fixture using existing cut out and wiring
- Comes in all available button light finishes, including new Dark Bronze finish
- Simple, quick and easy installation
- Retains low profile look after installation



LED button light not included

Model	Finish						Dimensions	
	BK	BN	CB	CH	DB	WT	Ø	H
HR-LED-COV	•	•	•	•	•	•	2 5/8"	7/8"

LED button light not included.




LEDme™ Button Light Drivers


- Compact and reliable constant current LED power supply
- "Plug and Play" terminal blocks for wiring up to four HR-LED85 LED button lights
- Surge protection
- Short circuit protection
- Low profile at 1 5/8" or less



Model	Watt	Power up to	Dimensions		
			L	W	H
LED-350MA03-RB	3W	1 LED85	5 5/8"	1 5/8"	1 1/8"
LED-350MA09-RB	9W	3 LED85	7 1/8"	3 1/8"	1 5/8"
LED-350MA12-RB	12W	4 LED85	7 1/8"	3 1/8"	1 5/8"




Series wiring set up (LED-350MA12-RB)

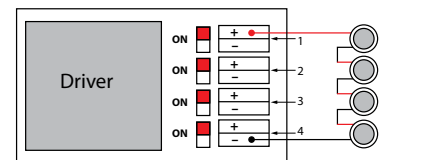

Note: A minimum of two Button Lights are required to wire in series. The positive wire needs to be connected to the positive port on terminal 1, the negative wire needs to be connected to the negative port on terminal 4.

Home-run wiring set up (LED-350MA12-RB)

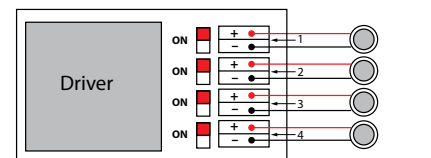

drawings not to scale

— positive (+) wire
— negative (-) wire

Finish Key: BK – Black, BN – Brushed Nickel, CB – Copper Bronze, CH – Chrome, DB – Dark Bronze, WT – White



2009 New Products

Low Voltage Recessed Shower Lights

- Abrasion resistant finish
- Solid die cast aluminum construction with heavy gauge retention clips to firmly hold trim to housing
- Transformer and junction box accessible from below the ceiling
- Re-lamp without removing entire trim from ceiling




3" SHOWER LIGHT—CLEAR, FLAT LENS 25° ADJUSTMENT FROM VERTICAL

UL listed for wet locations

Model	Finish	Reflector	Trim	
HR-D329-S	WT	Specular Clear	White	
Lamp	Housings *			
MR16 35W max	HR-302E	HR-302M	HR-301E	HR-301M

Order lamp separately. * See p.223 of 25th Anniversary Catalog for more detail on housings.

Example: **HR-D329-S-WT**




4" SHOWER LIGHT—CLEAR, FLAT LENS 35° ADJUSTMENT FROM VERTICAL

UL listed for wet locations

Model	Finish	Reflector	Trim	
HR-D418-S	WT	Specular Clear	White	
Lamp	Housings *			
MR16 50W max	HR-8402E	HR-8402H	HR-8403H	HR-8401E
		HR-8402HL	HR-8403HF	HR-8401H
		HR-8402HF		HR-8401HF

Order lamp separately. * See p.225 of 25th Anniversary Catalog for more detail on housings.

Example: **HR-D329-S-WT**



4" LINEAR™ Jumper Cable


- Flexible connector for connecting two sections of LINEAR™ low voltage track
- Shorter length allows for less wire clutter when joining track sections



Model	Finish	Length
	BK WT	
SJS4	• •	4"

Flexible connector connects 2 sections of track.

Example: **SJS4-WT**



Finish Key: BK – Black, WT – White

Corporate Headquarters:
615 South Street
Garden City, NY 11530

West Coast Office:
168 Brea Canyon Road
City of Industry, CA 91789

Dallas Trade Mart Showroom #3934
2500 Market Center Blvd.
Dallas, TX 75207

wacighting.com
Tel: 800.526.2588
Fax: 800.526.2585