

Company Headquarters:
615 South Street
Garden City, NY 11530

West Coast Office:
168 Brea Canyon Road
City of Industry, CA 91789


Dallas Trade Mart Showroom #3934
2500 Market Center Blvd.
Dallas, TX 75207

waclighting.com
Tel: 800.526.2588
Fax: 800.526.2585

We are proud to present our selection of lamps to complement WAC Lighting's complete offering of resources in the selection of your luminaires. Our Lamps Catalog features a broad range of Halogen and Xenon as well as Energy Efficient LED, Compact Fluorescent, and other specialty lamps, including LED Rope Lighting. WAC light sources have been sourced to meet the high standards that you have come to expect from WAC Lighting. A name that you can trust.

LED ROPE LIGHT

- Low Profile at 1/2" x 7/16"
- LEDs spaced at even 1 inch intervals
- Average life of 50,000 hours
- Dimmable with Electronic Low Voltage (ELV) Dimmer
- Sections may be interconnected up to 150 feet
- Directly connects to a 120V AC power supply
- Waterproof and UV resistant
- Low operating temperature
- Custom lengths available, see table below for more information
- Easy to install; mounting clips included for all Rope Light Kits only
- Includes 6 foot Cord and Plug, Female End Cap and Mounting Clips
- UL and CSA Listed

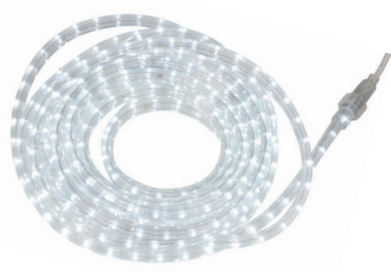

ROPE LIGHT KITS

Model					Color	Color Temp	Lm/ft	Watt/ft	
LED-RL-3	LED-RL-5	LED-RL-15	LED-RL-30	LED-RL-150					
3 feet	5 feet	15 feet	30 feet	150 feet					
	•	•	•	•	AM	Amber	590-595n	7	0.6
•		•	•	•	BL	Blue	465-470n	7	1.0
•		•	•	•	GR	Green	515-520n	19	1.0
	•	•	•	•	RD	Red	625-630n	10	0.6
•		•	•	•	WT	White	3500K	10	1.0
10	10	20	40	160	Mounting Clips				

Example Order: **LED-RL-3-AM**

CUSTOM CUT LENGTH ORDERING INFO

1. Order multiples of 3' or 5'	2. Order power cord	3. Order mounting clips
LED-RL-3X-WT 3ft White	LED-RL-PL 6ft	LED-RL-CP 10 Pack
LED-RL-3X-BL 3ft Blue		
LED-RL-3X-GR 3ft Green		
LED-RL-5X-RD 5ft Red		
LED-RL-5X-AM 5ft Amber		recommended 1 clip per foot, sold in packs of 10 only

There is an added service charge for custom length orders.



*Items in this catalog do not fall under the WAC Lighting 5 year warranty, all products are subject to individual manufacturer warranties.

LED REPLACEMENT MODULES

- **For use in WAC Lighting energy efficient LEDme™ products, including Downlights, Track Heads, QUICK CONNECT™ Pendants and Fixtures, Light Bars, Button Lights and Display Lights. When ordering for large projects, it is suggested to order extra replacement modules at the same time.**

Product	Model	Watt	Color Temp
2" Downlight	RM1X3-30-DL	1 × 3W	3000K
	RM1X3-45-DL	1 × 3W	4500K
3" Downlight	RM3X3-30-DL	3 × 3W	3000K
	RM3X3-45-DL	3 × 3W	4500K
4" Downlight	RM6X3-30-DL	6 × 3W	3000K
	RM6X3-45-DL	6 × 3W	4500K
120V/FLEXRAIL1™ Track Heads	RM3X3-30-TK	3 × 3W	3000K
	RM3X3-45-TK	3 × 3W	4500K
	RM6X3-30-TK	6 × 3W	3000K
	RM6X3-45-TK	6 × 3W	4500K
QUICK CONNECT™ Pendants	RM3X1-30-QP	3 × 1W	3000K
QUICK CONNECT™ Fixtures	RM3X3-30-QF	3 × 3W	3000K
Light Bars	RM2X1-30-BA	2 × 1W	3000K
	RM4X1-30-BA	4 × 1W	3000K
Button Light	RM3X1-30-HR	3 × 1W	3000K
Display Light	RM1X3-30-SL	1 × 3W	3000K
	RM1X3-45-SL	1 × 3W	4500K
	RM1X3-60-SL	1 × 3W	6000K

LED LAMPS

- **For use in WAC Lighting LINEAR™ Track and LINEAR™ Undercabinet fixtures.**

- Replaces xenon festoon lamps with an energy efficient, directional, and cooler operating option
- Emits a directional light that may be aimed by rotating the lamp within the socket

LED FESTOON BASE

Model	Volt	Watt	Lumens	Color Temp	Avg. Life	Base	Length	Beam
LED-FS-60	12V	0.6W	19	3200K	50,000 hrs	Festoon	1¾"	30°
LED-FS-60-24V	24V	0.6W	19	3200K	50,000 hrs	Festoon	1¾"	30°

Lamps/Pack: 1



Suggestion: As the load is significantly reduced, ensure that the total load is greater than the minimum load requirements of the transformer where applicable.

FLUORESCENT LAMPS

- **For use in WAC Lighting FLEXRAIL1™ and FLEXRAIL2™ track heads, 120V track heads, Multiple Spots, and Recessed Downlights.**

- Replaces incandescent PAR lamps with high performance, energy efficient, and longer lasting fluorescent lamps

COMPACT FLUORESCENT MEDIUM BASE PAR

Model	Volt	Watt	Lumens	Color Temp	Avg. Life	Base	Dimensions
CFL09W-27-PAR20	120V	9W	320	2700K	8,000 hrs	E26	Ø2½" W × 3⅞" L
CFL11W-27-PAR30S	120V	11W	560	2700K	8,000 hrs	E26	Ø3¾" W × 3⅞" L
CFL15W-27-PAR30L	120V	15W	700	2700K	8,000 hrs	E26	Ø3¾" W × 4¾" L
CFL23W-27-PAR38	120V	23W	1200	2700K	8,000 hrs	E26	Ø4¾" W × 5⅞" L

Lamps/Pack: 1



FLUORESCENT LAMPS

- **For use in WAC Lighting Energy Star Rated fluorescent fixtures, including Modernism™, Caribe and Wall Wash track heads, Energy Efficient pendants, and Recessed Downlights.**

COMPACT FLUORESCENT

Model	Watt	Lumens	Color Temp	Avg. Life	Base	Dimensions
Quad 4-pin / G24q Base						
PLC13W-27	13W	720	2700K	12,000 hrs	G24q	Ø1 ³ / ₈ " × 5 ¹ / ₈ " L
PLC13W-41	13W	720	4100K	12,000 hrs	G24q	Ø1 ³ / ₈ " × 5 ¹ / ₈ " L
PLC18W-27	18W	1000	2700K	12,000 hrs	G24q	Ø1 ³ / ₈ " × 5 ¹ / ₂ " L
PLC18W-41	18W	1000	4100K	12,000 hrs	G24q	Ø1 ³ / ₈ " × 5 ¹ / ₂ " L
PLC26W-27	26W	1400	2700K	12,000 hrs	G24q	Ø1 ³ / ₈ " × 6 ¹ / ₂ " L
PLC26W-41	26W	1400	4100K	12,000 hrs	G24q	Ø1 ³ / ₈ " × 6 ¹ / ₂ " L
Tri-Tube 4-pin / GX24q Base						
PLT18W-27	18W	1000	2700K	12,000 hrs	GX24q	Ø1 ⁷ / ₈ " × 4 ⁵ / ₈ " L
PLT18W-41	18W	1000	4100K	12,000 hrs	GX24q	Ø1 ⁷ / ₈ " × 4 ⁵ / ₈ " L
	26W	1400	2700K	12,000 hrs	GX24q	Ø1 ⁷ / ₈ " × 5 ¹ / ₂ " L
PLT26W-41	26W	1400	4100K	12,000 hrs	GX24q	Ø1 ⁷ / ₈ " × 5 ¹ / ₂ " L
PLT32W-27	32W	1500	2700K	12,000 hrs	GX24q	Ø1 ⁷ / ₈ " × 5 ⁵ / ₈ " L
PLT32W-41	32W	1500	4100K	12,000 hrs	GX24q	Ø1 ⁷ / ₈ " × 5 ⁵ / ₈ " L
PLT42W-27	42W	1900	2700K	12,000 hrs	GX24q	Ø1 ⁷ / ₈ " × 6 ¹ / ₂ " L
PLT42W-41	42W	1900	4100K	12,000 hrs	GX24q	Ø1 ⁷ / ₈ " × 6 ¹ / ₂ " L
Twin Tube 4-pin / 2G11 Base						
PLL18W-27	18W	1100	2700K	12,000 hrs	2G11	Ø1 ³ / ₄ " × 8 ⁵ / ₈ " L
PLL18W-41	18W	1100	4100K	12,000 hrs	2G11	Ø1 ³ / ₄ " × 8 ⁵ / ₈ " L
PLL24W-27	24W	1600	2700K	12,000 hrs	2G11	Ø1 ³ / ₄ " × 12" L
PLL24W-41	24W	1600	4100K	12,000 hrs	2G11	Ø1 ³ / ₄ " × 12" L
PLL36W-27	36W	2600	2700K	12,000 hrs	2G11	Ø1 ³ / ₄ " × 15 ⁷ / ₈ " L
PLL36W-41	36W	2600	4100K	12,000 hrs	2G11	Ø1 ³ / ₄ " × 15 ⁷ / ₈ " L
PLL40W-27	40W	2900	2700K	12,000 hrs	2G11	Ø1 ³ / ₄ " × 22" L
PLL40W-41	40W	2900	4100K	12,000 hrs	2G11	Ø1 ³ / ₄ " × 22" L

Lamps/Pack: 1



lengths vary by wattage



Top View



Base View



lengths vary by wattage



Top View



Base View



lengths vary by wattage



Top View




Base View

- **For use in WAC Lighting Light Bars and T5 Fluorescent Strip Lights, perfect for energy efficient cove or under cabinet lighting.**

T5 FLUORESCENT TUBES

Model	Watt	Lumens	Color Temp	Avg. Life	Base	Dimensions
F8W/T5/WW	8W	440	3000K	8,000 hrs	G5	Ø5/8" × 11 ³ / ₄ " L
F8W/T5/CW	8W	440	4100K	8,000 hrs	G5	Ø5/8" × 11 ³ / ₄ " L
F13W/T5/WW	13W	980	3000K	8,000 hrs	G5	Ø5/8" × 21 ⁵ / ₈ " L
F13W/T5/CW	13W	980	4100K	8,000 hrs	G5	Ø5/8" × 21 ⁵ / ₈ " L
F21W/T5/WW	21W	1700	3000K	8,000 hrs	G5	Ø5/8" × 33 ³ / ₈ " L
F21W/T5/CW	21W	1700	4100K	8,000 hrs	G5	Ø5/8" × 33 ³ / ₈ " L
F28W/T5/WW	28W	2470	3000K	8,000 hrs	G5	Ø5/8" × 45 ¹ / ₄ " L
F28W/T5/CW	28W	2470	4100K	8,000 hrs	G5	Ø5/8" × 45 ¹ / ₄ " L
F35W/T5/WW	35W	3150	3000K	8,000 hrs	G5	Ø5/8" × 57" L
F35W/T5/CW	35W	3150	4100K	8,000 hrs	G5	Ø5/8" × 57" L

Lamps/Pack: 1



ENERGY CODE COMPLIANT COMPACT FLUORESCENT CONVERSION KITS

- **For use in WAC Lighting incandescent 120V luminaires.**

- Convert incandescent fixtures into Title 24 or ASHRAE compliant fluorescent fixtures with these socket conversion kits
- Dimmable with Electronic Low Voltage (ELV) dimmer
- Contains tamper resistant medium base socket adapter to permanently convert to a GU24 lamp socket
- Includes CFL lamp and adapter

COMPACT FLUORESCENT LAMPS and MEDIUM BASE to GU24 BASE ADAPTER

Model	Volt	Watt	Lumens	Color Temp	Avg. Life	Base	Dimensions
CFL23W-27-GU24	120V	23W	1600	2700K	8,000 hrs	GU24	Ø2 ³ / ₈ " × 4 ⁵ / ₈ " L

Lamps/Pack: 1



MEDIUM BASE to GU24 BASE ADAPTER

Model	Volt	Amp	Lumens	Color Temp	Base	Dimensions
CFL-GU24-ADP	120V	5A	N/A	N/A	E26	Ø1 ¹ / ₂ " × 2 ³ / ₄ " L

Pack: 1



XENON LAMPS

- *For use in WAC Lighting Decorative glass pendants, Light Bars, Button Lights, Beauty Spots, QUICK CONNECT™ Fixtures, Counter Balance pendants and chandeliers, and LINEAR™ track heads.*

LOW VOLTAGE LAMPS

Model	Volt	Watt	Lumens	Color Temp	Avg. Life	Base	Length	Clear	Frosted
								CL	FR
Wedge									
T3-3-12V	12V	3W	23	3000K	20,000 hrs	Wedge	1"	•	•
T3-5-12V	12V	5W	33	3000K	10,000 hrs	Wedge	1"	•	•
T3-5-24V	24V	5W	38	3000K	10,000 hrs	Wedge	1"	•	•
T3-7.5-24V	24V	7.5W	65	3000K	10,000 hrs	Wedge	1"	•	•
T3-18-12V	12V	18W	250	3000K	20,000 hrs	Wedge	1 ⁷ / ₁₆ "	•	
Bi-pin									
BP-10-12V	12V	10W	100	3000K	10,000 hrs	G4	1 ¹ / ₄ "	•	•
BP-15-12V	12V	15W	150	3000K	10,000 hrs	G4	1 ¹ / ₄ "	•	•
BP-15-24V	24V	15W	150	3000K	10,000 hrs	G4	1 ¹ / ₄ "	•	•
BP-20-12V	12V	20W	200	3000K	10,000 hrs	G4	1 ¹ / ₄ "	•	•
BP-50-12V	12V	50W	600	3000K	10,000 hrs	GY6.35	1 ¹⁵ / ₁₆ "	•	
BP-20-24V	24V	20W	600	3000K	10,000 hrs	GY6.35	1 ¹⁵ / ₁₆ "	•	
BP-50-24V	24V	50W	600	3000K	10,000 hrs	GY6.35	1 ¹⁵ / ₁₆ "	•	
Rigid Loop									
XL-5-12V	12V	5W	45	3000K	20,000 hrs	Rigid Loop	1 ³ / ₄ "	•	•
XL-5-24V	24V	5W	40	3000K	20,000 hrs	Rigid Loop	1 ³ / ₄ "	•	•
XL-10-12V	12V	10W	100	3000K	20,000 hrs	Rigid Loop	1 ³ / ₄ "	•	•
XL-10-24V	24V	10W	90	3000K	20,000 hrs	Rigid Loop	1 ³ / ₄ "	•	•
Festoon									
XF-5-12V	12V	5W	50	3200K	5,000 hrs	Festoon	1 ³ / ₄ "	•	•
XF-5-24V	24V	5W	50	3200K	5,000 hrs	Festoon	1 ³ / ₄ "	•	•
XF-10-12V	12V	10W	120	3200K	5,000 hrs	Festoon	1 ³ / ₄ "	•	•
XF-10-24V	24V	10W	120	3200K	5,000 hrs	Festoon	1 ³ / ₄ "	•	•

Lamps/Pack: 10

Example Order: **T3-3-12V-CL**

LINE VOLTAGE JCD-25X

Model	Volt	Watt	Lumens	Color Temp	Avg. Life	Base	Length
JCD-25X	120V	25W	260	3000K	10,000 hrs	G8.0	1 ⁵ / ₈ "

Lamps/Pack: 10

MR16 HALOGEN LAMPS

LOW VOLTAGE DICHROIC REFLECTOR MR16

Model	Volt	Watt	CBCP	Color Temp	Avg. Life	Base	Beam
MR16-ESX	12V	20W	4100	3000K	3,000 hrs	GU5.3	12°
MR16-BAB	12V	20W	460	3000K	3,000 hrs	GU5.3	36°
MR16-BAB-G	12V	20W	460	3000K	3,000 hrs	GU5.3	36°
MR16-FMT	12V	35W	6300	3000K	3,000 hrs	GU5.3	12°
MR16-FMT-24V	24V	35W	6300	3000K	3,000 hrs	GU5.3	12°
MR16-FMW	12V	35W	1100	3000K	3,000 hrs	GU5.3	36°
MR16-FMW-G	12V	35W	1100	3000K	3,000 hrs	GU5.3	36°
MR16-FMW-24V	24V	35W	1100	3000K	3,000 hrs	GU5.3	36°
MR16-FMW-24V-G	24V	35W	1100	3000K	3,000 hrs	GU5.3	36°
MR16-EXT	12V	50W	9150	3000K	3,000 hrs	GU5.3	13°
MR16-EXT-24V	24V	50W	9150	3000K	3,000 hrs	GU5.3	13°
MR16-EXZ	12V	50W	3000	3000K	3,000 hrs	GU5.3	24°
MR16-EXZ-24V	24V	50W	3000	3000K	3,000 hrs	GU5.3	24°
MR16-EXN	12V	50W	1500	3000K	3,000 hrs	GU5.3	40°
MR16-EXN-G	12V	50W	1500	3000K	3,000 hrs	GU5.3	40°
MR16-EXN-24V	24V	50W	1500	3000K	3,000 hrs	GU5.3	40°
MR16-EXN-24V-G	24V	50W	1500	3000K	3,000 hrs	GU5.3	40°
MR16-FPA	12V	65W	10,900	3000K	3,000 hrs	GU5.3	13°
MR16-FPA-G	12V	65W	10,900	3000K	3,000 hrs	GU5.3	13°
MR16-FPA-24V-G	24V	65W	10,900	3000K	3,000 hrs	GU5.3	13°
MR16-FPB	12V	65W	2000	3000K	3,000 hrs	GU5.3	40°
MR16-FPB-G	12V	65W	2000	3000K	3,000 hrs	GU5.3	40°
MR16-FPB-24V-G	24V	65W	2000	3000K	3,000 hrs	GU5.3	40°

Lamps/Pack: 10

- *For use in WAC Lighting 120V track heads, FLEXRAIL1™ and FLEXRAIL2™ track heads, LINEAR™ track heads, Recessed Downlights, Surface Mount Spots and Display Lighting.*



SPECIALTY PERFORMANCE MR16 HALOGEN LAMPS

- For use in WAC Lighting 120V track heads, FLEXRAIL1™ and FLEXRAIL2™ track heads, LINEAR™ track heads, Recessed Downlights, Surface Mount Spots and Display Lighting, when Enhanced Luminaire Performance Is Desired.

Extended Life MR16

- Up to 18,000 hour lamp life, 6 times longer than standard MR16 lamps
- Minimizes the amount of installation maintenance
- Reduces lamp costs by eliminating up to 3 lamp replacements over lifetime
- Consistent color throughout lamp

USHIO LOW VOLTAGE ULTRALINE™ TITAN

Model	Volt	Watt	CBCP	Color Temp	Avg. Life	Base	Beam
MR16-EXT-U/UT	12V	50W	8600	3100K	18,000 hrs	GU5.3	12°
MR16-EXZ-U/UT	12V	50W	2700	3100K	18,000 hrs	GU5.3	24°
MR16-EXN-U/UT	24V	50W	1500	3100K	18,000 hrs	GU5.3	36°

Lamps/Pack: 10



High Output MR16

- Replace 50W MR16 lamps with 37W IR lamps for greater light output
- Special infrared reflective coating makes the filament more efficient
- Uses significantly less energy to produce a high light output
- No shift in color over the life of the lamp
- Exceptionally smooth beam pattern

INFRARED REFLECTOR LOW VOLTAGE MR16

Model	Volt	Watt	CBCP	Color Temp	Avg. Life	Base	Beam
MR16-FRB-IR	12V	37W	12,500	3000K	4,000 hrs	GU5.3	10°
MR16-FRA-IR	12V	37W	4400	3000K	4,000 hrs	GU5.3	25°
MR16-FMW-IR	12V	37W	2200	3000K	4,000 hrs	GU5.3	35°
MR16-EXT-IR	12V	50W	15,000	3000K	4,000 hrs	GU5.3	10°
MR16-EXZ-IR	12V	50W	5700	3000K	4,000 hrs	GU5.3	25°
MR16-EXN-IR	12V	50W	2850	3000K	4,000 hrs	GU5.3	35°

Lamps/Pack: 10



Daylight MR16

- High color temperature
- 4200K and 5300K (daylight spectrum)
- Specified to meet your specialty display applications

USHIO LOW VOLTAGE WHITESTAR™

Model	Volt	Watt	CBCP	Color Temp	Avg. Life	Base	Beam
MR16-EXZ-U/WS/4200	12V	50W	2000	4200K	4,000 hrs	GU5.3	24°
MR16-EXN-U/WS/4200	12V	50W	1200	4200K	4,000 hrs	GU5.3	36°
MR16-EXZ-U/WS/5300	12V	50W	1100	5300K	4,000 hrs	GU5.3	24°
MR16-EXN-U/WS/5300	12V	50W	600	5300K	4,000 hrs	GU5.3	36°

Lamps/Pack: 10



Fully enclosed MR16

- No light diffusion from back spill and 50% greater light output
- Reduced heat to socket, fixture and transformer
- Decorative aluminum coating in matte silver

USHIO LOW VOLTAGE SUPERLINE™ REFLEKTO™

Model	Volt	Watt	CBCP	Color Temp	Avg. Life	Base	Beam
MR16-EXZ-U/S	12V	50W	3000	3000K	3,500 hrs	GU5.3	24°
MR16-EXN-U/S	12V	50W	1580	3000K	3,500 hrs	GU5.3	36°

Lamps/Pack: 10



Soft White MR16

- Emits a soft white back light while also directing the light
- Integrated frosted cover lens

USHIO LOW VOLTAGE FROSTLINE™

Model	Volt	Watt	CBCP	Color Temp	Avg. Life	Base	Beam
MR16-U/FROST	12V	50W	850	2950K	4,000 hrs	GU5.3	N/A

Lamps/Pack: 10



HALOGEN LAMPS

Model	Volt	Watt	Lumens	Color Temp	Avg. Life	Base	Length	Clear	Frosted
Low Voltage JC Bi-pin									
JC-05	12V	5W	60	2900K	2,000 hrs	G4	1 3/16"	•	
JC-10	12V	10W	140	2900K	2,000 hrs	G4	1 3/16"	•	
JC-20	12V	20W	350	2900K	2,000 hrs	G4	1 3/16"	•	
JC-20-G635	12V	20W	230	2010K	2,000 hrs	GY6.35	1 1/2"	•	
JC-50	12V	50W	950	2900K	2,000 hrs	GY6.35	1 1/2"	•	
Line Voltage JC Bi-pin									
JCD-25	120V	25W	250	2900K	2,000 hrs	G8.0	1 3/4"	•	
JCD-50	120V	50W	800	2900K	2,000 hrs	G8.0	1 3/4"	•	•
Line Voltage j type double ended									
J-100	110-130V	100W	1650	2900K	2,000 hrs	R7S	4 5/8"	•	
J-150	110-130V	150W	2600	2900K	2,000 hrs	R7S	4 5/8"	•	
J-100-S	110-130V	100W	1650	2900K	2,000 hrs	R7S	3 1/8"	•	
J-150-S	110-130V	150W	2600	2900K	2,000 hrs	R7S	3 1/8"	•	
J-250-S	110-130V	250W	4250	2900K	2,000 hrs	R7S	3 1/8"	•	

Lamps/Pack: 10

Example Order: **JC-05-CL**

► For use in WAC Lighting Decorative glass pendants, Wall Sconces, Button Lights and Miniature Recessed fixtures.



► For use in WAC Lighting FLEXRAIL1™ pendants.



► For use in WAC Lighting FLEXRAIL1™ and FLEXRAIL2™ track heads and Display Lighting.



► For use in WAC Lighting 120V track heads, FLEXRAIL1™ and FLEXRAIL2™ track heads, QUICK CONNECT™ fixtures and Multiple Spots.

- Provides whiter and brighter light
- Developed for color critical retail applications
- Crisp light from great distances or up close
- Screw terminal ensures secure connection
- Directly replaces PAR36 lamps for improved luminaire performance



LOW VOLTAGE AR111 LAMPS

Model	Volt	Watt	CBCP	Color Temp	Avg. Life	Base	Beam
AR111-50-4	12V	50W	45,000	3000K	3,000 hrs	G53	4°
AR111-50-8	12V	50W	20,000	3000K	3,000 hrs	G53	8°
AR111-50-25	12V	50W	4000	3000K	3,000 hrs	G53	25°
AR111-75-8	12V	75W	30,000	3000K	3,000 hrs	G53	8°
AR111-75-25	12V	75W	5300	3000K	3,000 hrs	G53	25°
AR111-75-45	12V	75W	2000	3000K	3,000 hrs	G53	45°

Lamps/Pack: 6

► For use in WAC Lighting 120V track heads, FLEXRAIL1™ and FLEXRAIL2™ track heads, LINEAR™ track heads, Miniature Recessed fixtures and Display Lighting.

LOW VOLTAGE DICHROIC REFLECTOR MR11

Model	Volt	Watt	CBCP	Color Temp	Avg. Life	Base	Beam
MR11-FTD	12V	20W	700	3000K	3,000 hrs	GU4	30°
MR11-FTD-G	12V	20W	700	3000K	3,000 hrs	GU4	30°
MR11-FTD-24V	24V	20W	700	3000K	3,000 hrs	GU4	30°
MR11-FTH	12V	35W	1100	3000K	3,000 hrs	GU4	30°
MR11-FTH-G	12V	35W	1100	3000K	3,000 hrs	GU4	30°
MR11-FTH-24V	24V	35W	1100	3000K	3,000 hrs	GU4	30°
MR11-FTH-24-G	24V	35W	1100	3000K	3,000 hrs	GU4	30°

Lamps/Pack: 10



► For use in WAC Lighting 120V track heads, FLEXRAIL1™ and FLEXRAIL2™ track heads, and Surface Mount Spots.

LINE VOLTAGE GU10 BASE MR16

Model	Volt	Watt	CBCP	Color Temp	Avg. Life	Base	Beam
GU10-EXN	120V	50W	650	3000K	2,000 hrs	GU10	40°

Lamps/Pack: 10

