

INSTRUCTIONS:
Model:

LEDme® Quick Connect Socket Sets
MP-LED303 & QP-LED303

Overview :

Socket Set LED303 is designed for use with WAC MP-60E and all WAC quick connect canopies. Model MP-LED303 uses the same socket set as Model QP-LED303 except for QP-LED303 with a quick connector.

Model MP-LED303 is use with WAC power unit MP-60E.

Model QP-LED303 is use with WAC the quick connect adapters:

Solorail™ (LM), Duorail™ (LM2), Canopies (QMP), Linear (S), Line Voltage Tracks (H, J, L), Flexrail™ (HM1, HM)

Quick Connect™ Adapter (order separately)

Solorail (LM) Adapter: LM-QADP

Duorail (LM) Adapter: LM2-QADP

Flexrail1 (HM1) Adapter: HM1-EN50

Flexrail2 (HM) Adapter: HM-EN50


Linear (S) Adapter: SADP

Line Voltage Track (H, J, L) Adapter: EN-HQ50AR, EN-JQ50AR, EN-LQ50AR

Installing Shade:


1. Position Socket Set LED303 so that threads through the hole in the shade and screw on Ring from below by finger or Ring Tool.

(See diagram).

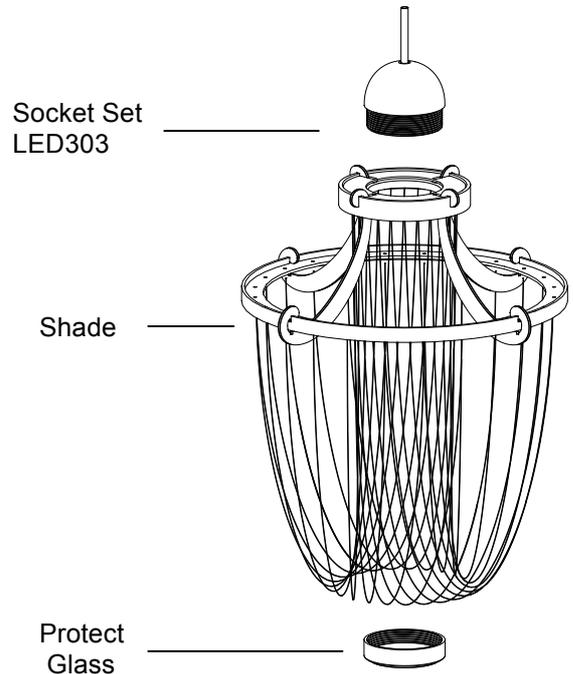

For model MP-LED303:


Put the knitted cable from the Socket Set into the cable grip (according to the steps 1,2,3, shown in the picture below)

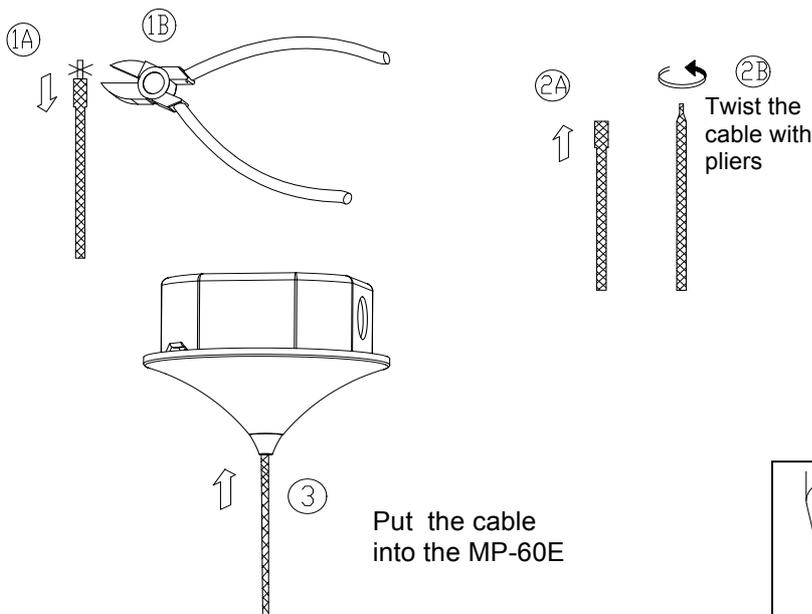

Put the cable into the MP-60E






For model QP-LED303:

1. Insert the post of the quick connect into the quick connect adapter.
2. Thread the top half of the conical section until it is flush with the adapter.
3. Adjust fixture position, but use caution not to loosen the conical section.

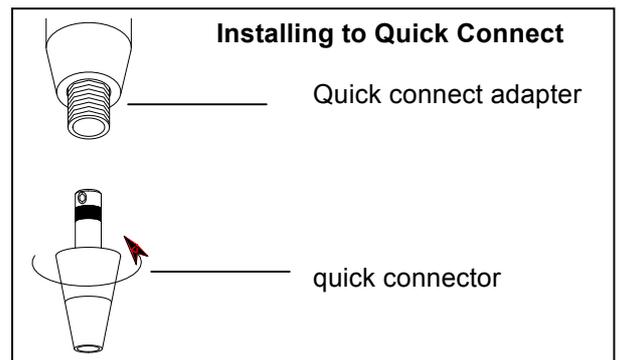

To Install / Shorten the cable:

Feed the cable end through the Top Conical section and the metal finial. If cable needs to be shortened, make the cut now. To install the top conical section, follow the step-by-step instructions bellow. **NOTE: Pendant cables are co-axial, if the lower screw in step 4 is made too tight, the inner an outer wire will short. A short circuit will render the entire system in-operative and possibly damage the transformer. Check all pendant splices for continuity before installing.**

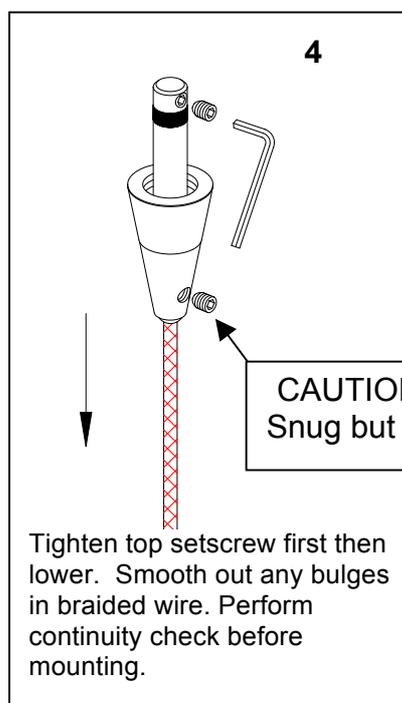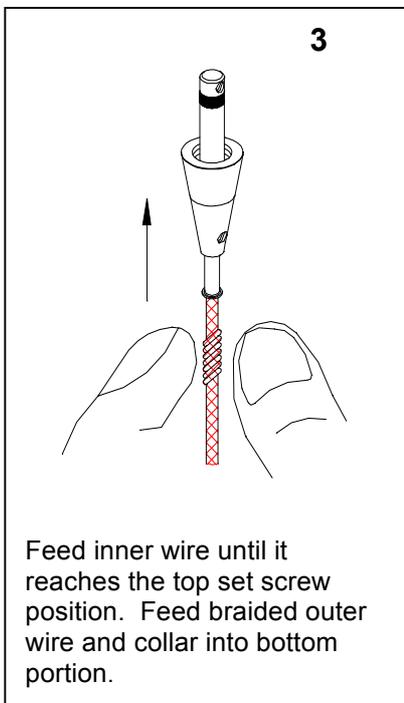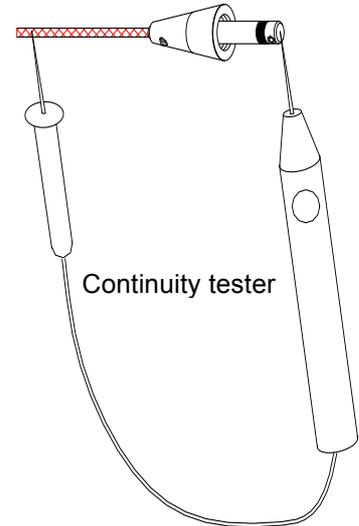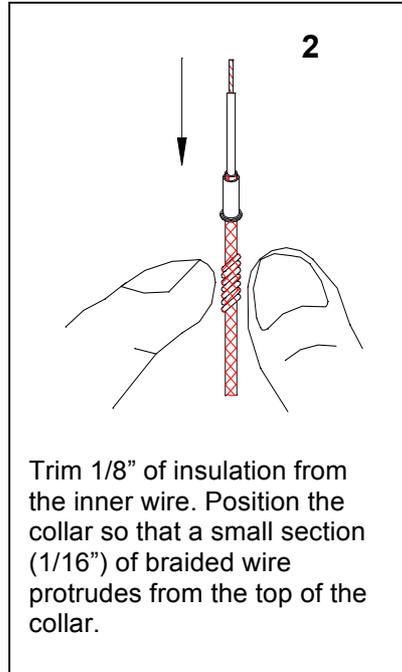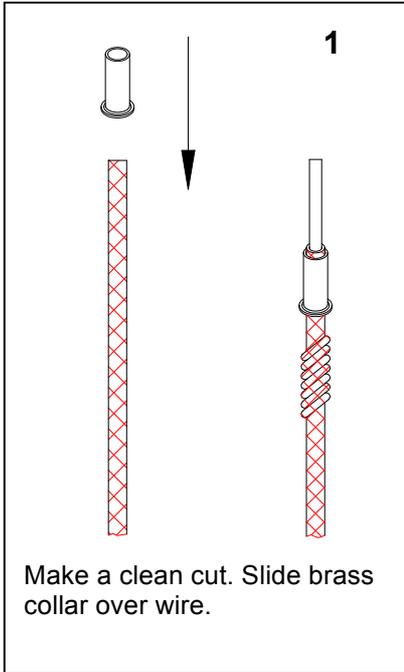

Check Splice:

Before mounting, with lamp removed from the socket, check for continuity. There should be none.

Insert lamp in socket and re-check. There should now be continuity, indicating a completed circuit.

Install with power off.

CAUTION:
Snug but not tight