
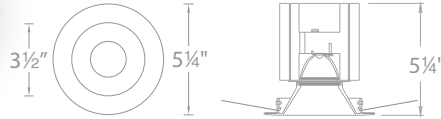


# HR-3LED-T218

3.5" Tesla™ LED Shower Trim

# WAC LIGHTING

Responsible Lighting®

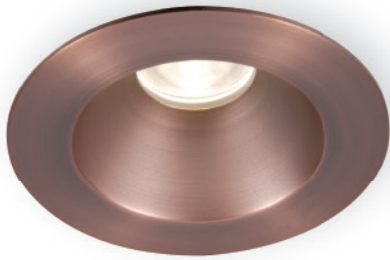

Fixture Type:

Catalog Number:

Project:

Location:

## PRODUCT DESCRIPTION

Minimum profile, round shower trim with interior open reflector.

## FEATURES

- 3.5" aperture
- Wet location listed
- 30° visual cutoff angle for glare control
- 50,000 hour rated life
- 5 year WAC Lighting product warranty

## SPECIFICATIONS

**Construction:** Durable die-cast aluminum construction with borosilicate glass lens. Extruded aluminum heat sink.

**Power Consumption:** 21.5W

**Dimming:** 0-10V Dimming: 100%-10%  
ELV Dimming: 100%-15% (120V only)

**Mounting:** Two heavy gauge retention clips hold trim firmly to housing.

**Finish:** Powder coated white  
Electroplated brushed nickel and copper bronze

**Standards:** ETL & cETL Listed. Wet Location Listed.

## TRIMS

Model#	Beam	Color Temp	CRI	Lumens	CBCP	Finish
<b>HR-3LED-T218N</b> <i>Shower Light</i> <i>Wet Location Listed</i>	28°	<b>27</b> 2700K	85	790	1889	<b>BN</b> <i>Brushed Nickel</i> <b>CB</b> <i>Copper Bronze</i> <b>WT</b> <i>White</i>
		<b>W</b> 3000K	85	780	1975	
		<b>9W</b> 3000K	90	718	1819	
		<b>35</b> 3500K	85	790	2051	
		<b>C</b> 4000K	85	730	2012	

**HR-3LED-T218N** -  -

Example: **HR-3LED-T218N-C-CB**

**COMPATIBLE HOUSINGS** See individual housing spec sheets for complete information.

### New Construction

<b>HR-3LED-H18D1-ICA</b> <i>Narrow, IC-Rated, Airtight</i>	120V-277V	<b>HR-3LED-H18D1-ICAC</b> <i>Narrow, IC-Rated, Airtight Chicago Plenum</i>	120V-277V
<b>HR-3LED-H18D-ICA</b> <i>IC-Rated, Airtight</i>	120V-277V	<b>HR-3LED-H18D-ICAC</b> <i>IC-Rated, Airtight Chicago Plenum</i>	120V-277V
<b>HR-3LED-H18D-EMICA</b> <i>IC-Rated, Airtight Emergency Backup Battery</i>	120V	<b>HR3LED-H18D-EMICAF</b> <i>IC-Rated, Airtight Emergency Backup Battery</i>	277V
<b>HR-3LED-H18D-A</b> <i>New Construction Non-IC, Airtight</i>	120V-277V		

### Remodel

<b>HR-3LED-R18D-A</b> <i>Non-IC, Airtight</i>	120V-277V	<b>HR-3LED-R22D</b> <i>Non-IC</i>	120V-277V
--	-----------	--------------------------------------	-----------

## REPLACEMENT MODULES

### Reflectors

<i>Spot</i>	<b>SL-REF-LUX10-S</b>
<i>Narrow Flood</i>	<b>SL-REF-LUX10-N</b>
<i>Flood</i>	<b>SL-REF-LUX10-F</b>

### LED

2700K	85 CRI	<b>LXS8-PW27</b>
3000K	85 CRI	<b>LXS8-PW30</b>
3000K	90 CRI	<b>LXS9-PW30</b>
3500K	85 CRI	<b>LXS8-PW35</b>
4000K	85 CRI	<b>LXS8-PW40</b>

waclighting.com

Phone (800) 526.2588

Fax (800) 526.2585

Headquarters/Eastern Distribution Center

44 Harbor Park Drive

Port Washington, NY 11050

Central Distribution Center

1600 Distribution Ct

Lithia Springs, GA 30122

Western Distribution Center

1750 Archibald Avenue

Ontario, CA 91760