
# SCOOP 12V/120V/277V LED BOLLARD





## LANDSCAPE LIGHTING





| Fixture Type: |     |
|---------------|-----|
| Catalog Numbe | er: |
| Project:      |     |
| Location:     |     |

#### **PRODUCT DESCRIPTION**

Sleek linear design blends seamlessly into pathways while providing soft, even illumination

### **FEATURES**

- IP66 rated, Protected against powerful water jets
- · Factory sealed water tight fixtures
- Mounting accessories included
- UL & cUL 1838 Listed (12V); 1598 Listed (120V/277V)

| Model Color Temp |      | r Temp   | Finishes                             |          |   |
|------------------|------|----------|--------------------------------------|----------|---|
| 6611             | 12V  | 27<br>30 | 2700K Warm White<br>3000K Pure White | BZ<br>BK | Bronze on Aluminum<br>Black on Aluminum |
| 6612             | 120V | 27<br>30 | 2700K Warm White<br>3000K Pure White | BZ<br>BK | Bronze on Aluminum<br>Black on Aluminum |
| 6613             | 277V | 27<br>30 | 2700K Warm White<br>3000K Pure White | BZ<br>BK | Bronze on Aluminum<br>Black on Aluminum |

6611-\_\_\_BZ

Example: **6611-30BZ** 

#### **SPECIFICATIONS**

6611

**Input:** 9-15VAC (Transformer is required)

Power: 5.7W / 6.0VA
Brightness: Up to 135 Im

**CRI:** 90

Rated Life: 60,000 hours

Dimming: MLV dimming only

6612

 Input:
 120V

 Power:
 12.5W

 Brightness:
 Up to 350 lm

 CRI:
 90

Rated Life: 60,000 hours

**Dimming:** TRIAC or ELV dimming

6613

 Input:
 277V

 Power:
 10.5W

 Brightness:
 Up to 300 lm

 CRI:
 90

**Rated Life**: 60,000 hours **Dimming:** ELV dimming only



waclighting.com Phone (800) 526.2588 Fax (800) 526.2585 **Headquarters/Eastern Distribution Center** 44 Harbor Park Drive Port Washington, NY 11050 Central Distribution Center 1600 Distribution Ct Lithia Springs, GA 30122 Western Distribution Center 1750 Archibald Avenue Ontario, CA 91760

# SCOOP 12V/120V/277V LED BOLLARD

## 6611/6612/6613


# LANDSCAPE LIGHTING

WAC

• Recommended spacing for installation :

6611 (12V)


Residential: 5 to 6ft Commercial: 3 to 4ft

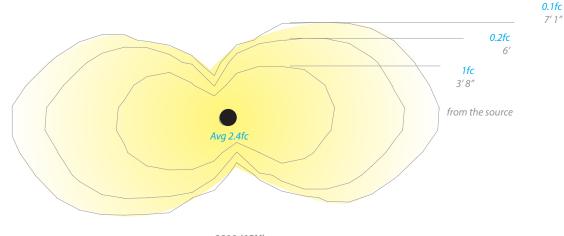

6611 (12V)

• Recommended spacing for installation :

6612, 6613 (120V, 277V) Residential: 6.5 to 7.5ft Commercial: 4.5 to 5.5ft

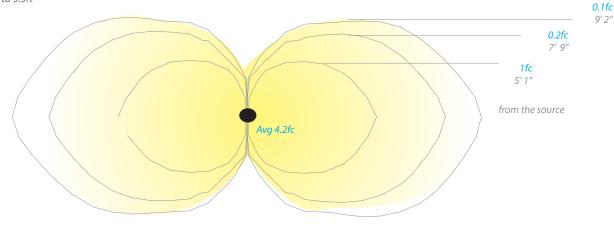

6612, 6613 (120V, 277V)