

# WAC LIGHTING

## InvisiLED® Dim-To-Warm

Remote Power Supply - 60W/96W, 120-277VAC/24VDC

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

### Model & Product

PS-24DC-U60R-WD-SM 60W 120-277VAC INPUT 24VDC Power Supply  
PS-24DC-U96R-WD-SM 96W 120-277VAC INPUT 24VDC Power Supply

### L x W x H

7.6875" X 3.875" X 1.375"  
7.6875" X 3.875" X 1.375"

Example: **PS-24DC-U60R-WD-SM**

### DESCRIPTION

This class 2 UL & cUL listed enclosed electronics power supply is one of the most exciting LED power supplies available. What makes this InvisiLED Dim-To-Warm power supply unique is that it allows for lowest dimming CCT adjustability among 1800K/1900K/2000K/2100K/2200K right on power supply as you gradually dim the light from 3000K /3500K with InvisiLED Dim-To-Warm. It is compatible with ELV or 0-10V dimmer. Additionally, it features different kinds of protection from over voltage, short circuit. It is incredibly robust and includes a 5 year warranty. It works with an input voltage of 120-277VAC so you can utilize it for many commercial applications. It features an integrated wiring compartment for a streamlined installation.

### FEATURES

- Universal Input 120-277VAC
- $\geq 0.9$  pf
- Overload and short circuit protection
- ELV/0-10V Dimming Control
- Select and choose desirable lowest CCT
- Class 2 Output
- FCC Part 15 Class B Compliant
- 5 Year warranty

### SPECIFICATIONS

Input:	120-277 VAC, 50/60Hz
Dimming:	ELV: 100-1% , 0-10V: 100-1%
Rated Life:	50000 Hours
Mounting:	Can be mounted on ceiling or wall in all orientations
Finish:	BLACK
Operating Temp:	-4°F to 104°F (-20°C to 40°C)
Standards:	UL, cUL, Damp Location Listed, ADA




### FINISHES:



BLACK

### LINE DRAWING:

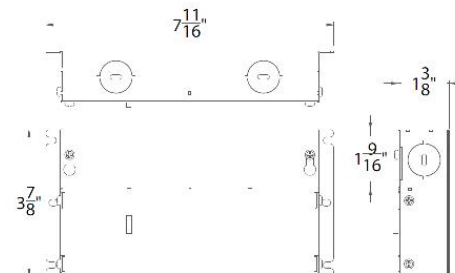

# WAC LIGHTING

## InvisiLED® Dim-To-Warm

Remote Power Supply - 60W/96W, 120-277VAC/24VDC

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_



Project: \_\_\_\_\_

Location: \_\_\_\_\_

---

### ACCESSORIES

---

	<i>Model</i>	<i>Description</i>	<i>Finish</i>
	<b>T24-IC-002-BK</b> <b>T24-IC-002-WT</b> <b>T24-IC-006-BK</b> <b>T24-IC-006-WT</b> <b>T24-IC-012-BK</b> <b>T24-IC-012-WT</b> <b>T24-IC-036-BK</b> <b>T24-IC-036-WT</b> <b>T24-IC-072-BK</b> <b>T24-IC-072-WT</b> <b>T24-IC-144-BK</b> <b>T24-IC-144-WT</b> <b>T24-IC-240-BK</b> <b>T24-IC-240-WT</b>	Joiner Cable Joiner Cable Joiner Cable Joiner Cable Joiner Cable Joiner Cable Joiner Cable Joiner Cable Joiner Cable Joiner Cable Joiner Cable Joiner Cable Joiner Cable Joiner Cable	BLACK WHITE BLACK WHITE BLACK WHITE BLACK WHITE BLACK WHITE BLACK WHITE BLACK WHITE
	<b>T24-FF-WT</b>	Joiner Cable Extender	WHITE