

WAC LIGHTING

H/J/L/J2 Track

Feed Canopy with Cable Suspension

Model & Track System

J2-SKCF96 J2 Track
SKCF96 H/J/L Track

Finish

BK Black
WT White

Example: **J2-SKCF96-BK**

DESCRIPTION

120V Track systems are modular and can be designed for multiple applications in nearly any interior environment. Cable suspensions suspend the track up to 96" below the ceiling. The feed canopy with cable suspension supplies 120VAC power from ceiling mounted junction boxes, while suspending the track up to 96" from the ceiling. Suspensions may be field cut to custom lengths.

FEATURES

- Power feeds and suspends track lighting from ceiling mounted junction boxes.
- SKCF96 is compatible with H/L/J track. J2-SKCF96 is compatible with J2 track.
- Includes 96in of aircraft cable and cable gripper for fine-tuned suspension adjustment.
- SKCF96: Includes 12/3 feed cable for H/L/J track connectors with cable clamp fitting.
- J2-SKCF96: Includes 12/4 feed cable for J2 track connectors with cable clamp fitting.
- Aircraft cable and feed wire may be field cut.
- 5 year warranty

SPECIFICATIONS

Construction:	Powder coated steel canopy with 96in aircraft and feed cable
Input:	120 VAC, 50/60Hz
Mounting:	Installs to junction boxes mounted to flat ceilings.
Finish:	Electrostatically Powder Coated: White, Black
Operating Temp:	-4°F to 104°F (-20°C to 40°C)
Standards:	UL, cUL, Dry Location Listed

Fixture Type: _____


Catalog Number: _____

Project: _____

Location: _____




FINISHES:



Black

White

LINE DRAWING:

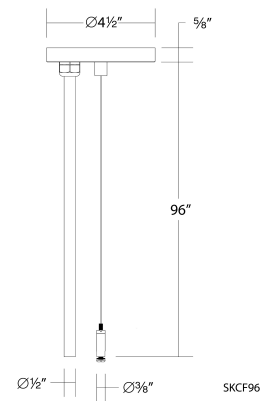

WAC LIGHTING

H Track

120V Single Circuit Track Section

Model & Size	Finish
HT2 2'	BK Black
HT4 4'	BN Brushed Nickel
HT6 6'	DB Dark Bronze
HT8 8'	WT White

Example: **HT2-BK**

DESCRIPTION

120V Track systems are modular and can be designed for multiple applications in nearly any interior environment. Choose from hundreds of compatible track fixtures and pendants by WAC Lighting to install on track systems. Versatile yet sturdy, track systems can be surface mounted or suspended from ceilings, enabling the lighting design to adapt to changing styles and spaces. Track may be field cut to size and combine power connectors, accessories, and suspension options to build a complete system.

FEATURES

- May be field cut and easily installed on a variety of surfaces
- End caps and mounting hardware included
- Retrofits into many popular track systems on the market today
- 5 year warranty

SPECIFICATIONS

Construction:	Aluminum extrusion with copper bus wire
Power:	1920W
Input:	120 VAC, 50/60Hz
Finish:	Electroplated:Brushed Nickel, Electroplated::Black, Electroplated::White, Electroplated::Dark Bronze, Electroplated::Dark Bronze, Electroplated::Black, Electroplated::White, Electrostatically Powder Coated:Dark Bronze, Electrostatically Powder Coated::White, Electrostatically Powder Coated::Brushed Nickel, Electrostatically Powder Coated::Black, Electroplated::White
Operating Temp:	-4°F to 104°F (-20°C to 40°C)
Standards:	UL, cUL, Dry Location Listed

Fixture Type: _____


Catalog Number: _____

Project: _____

Location: _____




FINISHES:

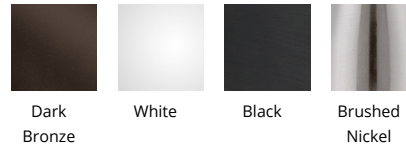

LINE DRAWING:



H System Adapter



H Track System

WAC LIGHTING

J2 Track

120V Dual Circuit Track Section

System Type	Model & Size	Finish
J2	T4 4' T8 8'	BK Black WT White

Example: **J2-T4-BK**

DESCRIPTION

120V Track systems are modular and can be designed for multiple applications in nearly any interior environment. J2 Track is a two circuit track system that can control lighting fixtures separately through two switches. Any WAC "J" style fixture can work on a J2 track system. Versatile yet sturdy, track systems can be surface mounted or suspended from ceilings, enabling the lighting design to adapt to changing styles and spaces. Track may be field cut to size and combine power connectors, accessories, and suspension options to build a complete system.

FEATURES

- May be field cut and easily installed on a variety of surfaces
- End caps and mounting hardware included
- Retrofits into many popular track systems on the market today
- Compatible with all JHT and JTK series track luminaires
- Enables the use of two separately switched circuits on one section or run of track
- Saves on installation costs by eliminating the need for long separate feed run
- Each circuit is rated at 20A and allows the control of two individual sets of fixtures
- Not recommended for dimming on both circuits. If two circuit dimming is required – use W track as alternate
- 5 year warranty

SPECIFICATIONS

Construction:	Aluminum extrusion with copper bus wire
Power:	1920W
Input:	120 VAC, 50/60Hz
Finish:	Electrostatically Powder Coated: Black, White
Operating Temp:	-4°F to 104°F (-20°C to 40°C)
Standards:	UL, cUL, Dry Location Listed

Fixture Type: _____


Catalog Number: _____

Project: _____

Location: _____



FINISHES:




White

Black

LINE DRAWING:



J2 System Adapter



WAC LIGHTING

J Track

120V Single Circuit Track Section

Model & Size	Finish
JT2 2'	BK Black
JT4 4'	BN Brushed Nickel
JT6 6'	WT White
JT8 8'	

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Example: **JT2-BK**

DESCRIPTION

120V Track systems are modular and can be designed for multiple applications in nearly any interior environment. Choose from hundreds of compatible track fixtures and pendants by WAC Lighting to install on track systems. Versatile yet sturdy, track systems can be surface mounted or suspended from ceilings, enabling the lighting design to adapt to changing styles and spaces. Track may be field cut to size and combine power connectors, accessories, and suspension options to build a complete system.

FEATURES


- May be field cut and easily installed on a variety of surfaces
- End caps and mounting hardware included
- Retrofits into many popular track systems on the market today
- 5 year warranty

SPECIFICATIONS

Construction:	Aluminum extrusion with copper bus wire
Power:	1920W
Input:	120 VAC, 50/60Hz
Finish:	Electroplated:Brushed Nickel, Electroplated::Black, Electroplated::White, Electrostatically Powder Coated:Black, Electrostatically Powder Coated::Brushed Nickel, Electrostatically Powder Coated::White
Operating Temp:	-4°F to 104°F (-20°C to 40°C)
Standards:	UL, cUL, Dry Location Listed




FINISHES:



LINE DRAWING:



J System Adapter



J Track System

WAC LIGHTING

L Track

120V Single Circuit Track Section

Model & Size	Finish
LT2 2'	BK Black
LT4 4'	BN Brushed Nickel
LT6 6'	WT White
LT8 8'	

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Example: **LT2-BK**

DESCRIPTION

120V Track systems are modular and can be designed for multiple applications in nearly any interior environment. Choose from hundreds of compatible track fixtures and pendants by WAC Lighting to install on track systems. Versatile yet sturdy, track systems can be surface mounted or suspended from ceilings, enabling the lighting design to adapt to changing styles and spaces. Track may be field cut to size and combine power connectors, accessories, and suspension options to build a complete system.

FEATURES


- May be field cut and easily installed on a variety of surfaces
- End caps and mounting hardware included
- Retrofits into many popular track systems on the market today
- 5 year warranty

SPECIFICATIONS

Construction:	Aluminum extrusion with copper bus wire
Power:	1920W
Input:	120 VAC, 50/60Hz
Finish:	Electroplated:Brushed Nickel, Electroplated::White, Electroplated::Black, Electrostatically Powder Coated:White, Electrostatically Powder Coated::Black, Electrostatically Powder Coated::Brushed Nickel, Electrostatically Powder Coated::Brushed Nickel, Electrostatically Powder Coated::Black
Operating Temp:	-4°F to 104°F (-20°C to 40°C)
Standards:	UL, cUL, Dry Location Listed




FINISHES:



LINE DRAWING:



L System Adapter



L Track System