

WAC LIGHTING

Lotos 4" & 6"

Round

Adjustable Downlight 5CCT

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Model	Beam	Color Temp & CRI	Lumens	CBCP	Finish
R4ERAR	W 45°	9CS 2700K/3000K/3500K/4000K/5000K - 90	690 800	925 1020	BK Black WT White

Example: **R4ERAR-W9CS-WT**

For custom requests please contact customs@wacighting.com

DESCRIPTION

The wafer-thin Lotos LED Recessed Kit with remote driver combines high quality light output and efficiency while eliminating the need for a large housing. This innovative design can be installed easily as a remodel or new construction with an optional frame-in kit sold separately. Lotos is available in a downlight version for general ambient lighting and an adjustable version with a gimbal that pivots 360 degrees on a hinge. Now available with 5-CCT options.

FEATURES


- 5-CCT Switchable between 2700K and 5000K
- Multiple LED array for uniform illumination
- Rotatable multi-axis gimbal ring
- Driver included
- 5 year warranty

SPECIFICATIONS

Color Temp:	2700K/3000K/3500K/4000K/5000K
Input:	120 -277 VAC,50/60Hz
CRI:	90
Dimming:	ELV: 100-5% ,TRIAC: 100-5%
Rated Life:	50000 Hours
Mounting:	Heavy gauge retention clips secures fixture to ceiling
Standards:	ETL, cETL, Title 24 JA8 Compliant, Energy Star 2.0 Wet Location Listed
Construction:	Steel with frosted TIR lens




FINISHES:



Black White

LINE DRAWING:

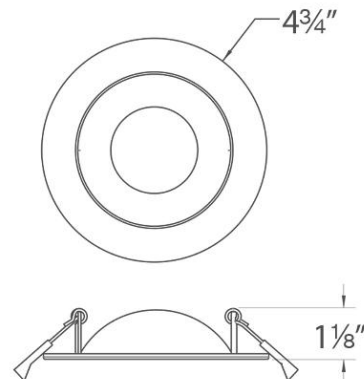

R4ERAR

WAC LIGHTING

Lotos 4" & 6"

Round

Adjustable Downlight 5CCT

Fixture Type: _____
 Catalog Number: _____
 Project: _____
 Location: _____

Model	Beam	Color Temp & CRI	Lumens	CBCP	Finish
R6ERAR	W 45°	9CS 2700K/3000K/3500K/4000K/5000K - 90	1290 1340	1920 1896	BK Black WT White

Example: **R6ERAR-W9CS-WT**

For custom requests please contact customs@wacighting.com

DESCRIPTION

The wafer-thin Lotos LED Recessed Kit with remote driver combines high quality light output and efficiency while eliminating the need for a large housing. This innovative design can be installed easily as a remodel or new construction with an optional frame-in kit sold separately. Lotos is available in a downlight version for general ambient lighting and an adjustable version with a gimbal that pivots 360 degrees on a hinge. Now available with 5-CCT options.

FEATURES


- 5-CCT Switchable between 2700K and 5000K
- Multiple LED array for uniform illumination
- Rotatable multi-axis gimbal ring
- Driver included
- 5 year warranty

SPECIFICATIONS


Color Temp:	2700K/3000K/3500K/4000K/5000K
Input:	120 -277 VAC,50/60Hz
CRI:	90
Dimming:	ELV: 100-5% ,TRIAC: 100-5%
Rated Life:	50000 Hours
Mounting:	Heavy gauge retention clips secures fixture to ceiling
Standards:	ETL, cETL, Title 24 JA8 Compliant, Energy Star 2.0 Wet Location Listed
Construction:	Steel with frosted TIR lens



FINISHES:



LINE DRAWING:

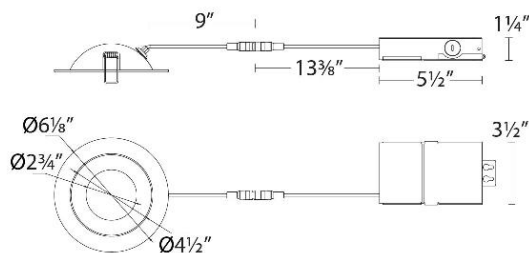

R6ERAR-W930-WT