

WAC LIGHTING

Mythical

Vertical Wall Sconce 3000K

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Model & Size	Color Temp & CRI	Finish	Watt	Voltage	LED Lumens	Delivered Lumens
WS-12712 12"	3000K 90	PN Polished Nickel	11W	120-277V	858	418

Example: **WS-12712-PN**

For custom requests please contact customs@wacighting.com

FEATURES

- One-inch thick solid crystal with bubbles
- Up & down light
- Junction box conceals a proprietary universal 120V-220V-277V driver (12")
- ACLED driverless technology (13", 18" & 24") with 277V special order
- Driver installed within the Junction Box, driver dimension: 2.8" x 1.3" x 1.2"
- 5 year warranty

SPECIFICATIONS

Color Temp:	3000K
Input:	120-277V,50/60Hz
CRI:	90
Dimming:	ELV: 100-10%
Rated Life:	50000 Hours
Mounting:	Can be mounted on wall vertically or upside down
Standards:	ETL, cETL, Title 24 JA8 Compliant Damp Location Listed
Construction:	Aluminum hardware with seedy glass diffuser




FINISHES:



Polished
Nickel

LINE DRAWING:

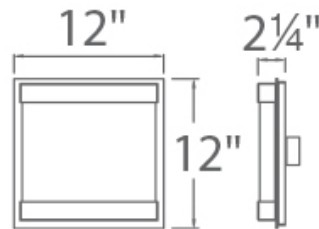

WAC LIGHTING

Mythical

Vertical Wall Sconce 3000K

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Model & Size	Color Temp & CRI	Finish	Watt	Voltage	LED Lumens	Delivered Lumens
WS-12713 13"	3000K 90	PN Polished Nickel	8W	120 VAC	392	139

Example: **WS-12713-PN**

•For 277V special order, add an "F" before the finish: WS-12713F-PN

For custom requests please contact customs@wacighting.com

DESCRIPTION

Sparkling effervescence of light.

FEATURES

- One-inch thick solid crystal with bubbles
- Up & down light
- Junction box conceals a proprietary universal 120V-220V-277V driver (12")
- ACLED driverless technology (13", 18" & 24") with 277V special order
- 0-10V dimming option (LDS065M010AFE-LO1) available (special order), unit dimensions: 3.4" x 1.2" x 0.5"
- ACLED driverless technology
- 5 year warranty

SPECIFICATIONS

Color Temp:	3000K
Input:	120 VAC,50/60Hz
CRI:	90
Dimming:	ELV: 100-10%
Rated Life:	54000 Hours
Mounting:	Can be mounted on wall in all orientations
Standards:	ETL, cETL, Title 24 JA8 Compliant Damp Location Listed
Construction:	Aluminum hardware with seedy glass diffuser



FINISHES:



Polished
Nickel

LINE DRAWING:

WAC LIGHTING

Mythical

Vertical Wall Sconce 3000K

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Model & Size	Color Temp & CRI	Finish	Watt	Voltage	LED Lumens	Delivered Lumens
WS-12718 18"	3000K 90	PN Polished Nickel	16W	120 VAC	771	333

Example: **WS-12718-PN**

•For 277V special order, add an "F" before the finish: WS-12718F-PN

For custom requests please contact customs@wacighting.com

DESCRIPTION

Sparkling effervescence of light.

FEATURES

- One-inch thick solid crystal with bubbles
- Up & down light
- Junction box conceals a proprietary universal 120V-220V-277V driver (12")
- ACLED driverless technology (13", 18" & 24") with 277V special order
- 0-10V dimming option (LDS065M010AFE-LO1) available (special order), unit dimensions: 3.4" x 1.2" x 0.5"
- ACLED driverless technology
- 5 year warranty

SPECIFICATIONS

Color Temp:	3000K
Input:	120 VAC,50/60Hz
CRI:	90
Dimming:	ELV: 100-10%
Rated Life:	54000 Hours
Mounting:	Can be mounted on wall in all orientations
Standards:	ETL, cETL, Title 24 JA8 Compliant Damp Location Listed
Construction:	Aluminum hardware with seedy glass diffuser




FINISHES:



Polished
Nickel

LINE DRAWING:

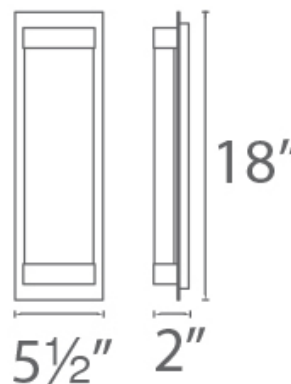

WAC LIGHTING

Mythical

Vertical Wall Sconce 3000K

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Model & Size	Color Temp & CRI	Finish	Watt	Voltage	LED Lumens	Delivered Lumens
WS-12724 24"	3000K 90	PN Polished Nickel	16W	120 VAC	730	326

Example: **WS-12724-PN**

•For 277V special order, add an "F" before the finish: WS-12724F-PN

For custom requests please contact customs@wacighting.com

DESCRIPTION

Sparkling effervescence of light.

FEATURES

- One-inch thick solid crystal with bubbles
- Up & down light
- Junction box conceals a proprietary universal 120V-220V-277V driver (12")
- ACLED driverless technology (13", 18" & 24") with 277V special order
- 0-10V dimming option (LDS065M010AFE-LO1) available (special order), unit dimensions: 3.4" x 1.2" x 0.5"
- ACLED driverless technology
- 5 year warranty

SPECIFICATIONS

Color Temp:	3000K
Input:	120 VAC,50/60Hz
CRI:	90
Dimming:	ELV: 100-10%
Rated Life:	54000 Hours
Mounting:	Can be mounted on wall in all orientations
Standards:	ETL, cETL, Title 24 JA8 Compliant Damp Location Listed
Construction:	Aluminum hardware with seedy glass diffuser



FINISHES:



Polished
Nickel

LINE DRAWING:

