

# WAC LIGHTING

## Ocularc 3.0

### Downlight Square

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

| Model | Beam  | Color Temp & CRI | Lumens | CBCP | Finish   |
|-------|-------|------------------|--------|------|--|
| R3BSD | F 50° | 927 2700K - 90   | 850    | 1240 | BK Black<br>BN Brushed Nickel<br>HZWT Haze/White<br>WT White |
|       |       | 930 3000K - 90   | 915    | 1333 |  |
|       |       | 930 3000K - 90   | 860    | 2485 |  |
|       | N 25° | 927 2700K - 90   | 860    | 2485 |  |
|       |       | 930 3000K - 90   | 925    | 2671 |  |
|       |       | 927 2700K - 90   | 865    | 4382 |  |
|       | S 15° | 930 3000K - 90   | 930    | 4710 |  |

Example: **R3BSD-F927-BK**

#### DESCRIPTION

Engineered with state of the art LED and driver technology, Ocularc 3.0, 2.0, 1.0 family of recessed lighting offers various styles, IC and Airtight Rated New Construction and Remodel, and low glare optical distributions to beautifully illuminate a diverse range of applications.

#### FEATURES


- Shallow housing under 4in depth
- Single spot light source
- 5 year warranty

#### SPECIFICATIONS


|                        |  |
|------------------------|--|
| <b>Construction:</b>   | Die-cast aluminum trim and heat sink   |
| <b>Power:</b>          | 11W  |
| <b>Light Source:</b>   | Integrated LED<br>3 Step Mac Adam Ellipse  |
| <b>Rated Life:</b>     | 50000 Hours  |
| <b>Mounting:</b>       | Heavy gauge retention clips support trim firmly  |
| <b>Finish:</b>         | Enamel Coated:Haze/White, Enamel Coated::Black,<br>Enamel Coated:::White, Enamel Coated:::Brushed Nickel |
| <b>Operating Temp:</b> | -4°F to 104°F (-20°C to 40°C)  |
| <b>Standards:</b>      | ETL, cETL, Wet Location Listed, Energy Star 2.0, Title 24 JA8 Compliant, Airtight                        |



#### FINISHES:

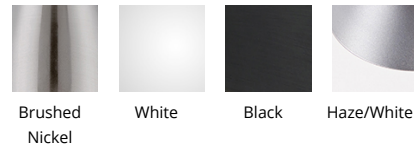

#### LINE DRAWING:

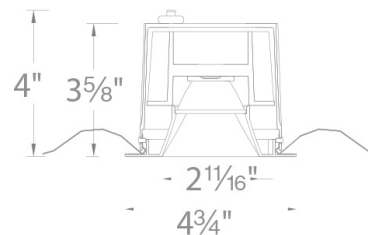

# WAC LIGHTING

## Ocularc 3.0

### Remodel Housing

#### Model & Product

R3BBRT-10 Ocularc 3.0 LED Remodel IC-Rated Housing

Example: **R3BBRT-10**

#### DESCRIPTION

Engineered with state of the art LED and driver technology, Ocularc 3.0, 2.0, 1.0 family of recessed lighting offers various styles, IC and Airtight Rated New Construction and Remodel, and low glare optical distributions to beautifully illuminate a diverse range of applications.

#### FEATURES

- Shallow housing under 4in depth
- Driver concealed within the fixture
- 5 year warranty

#### SPECIFICATIONS

|                    |   |
|--------------------|---|
| Construction:      | 20 gauge cold rolled steel wiring box                         |
| Power:             | 11W   |
| Input:             | 120 VAC, 50/60Hz  |
| Dimming:           | ELV: 100-5% , 0-10V: 100-5%, TRIAC: 100-5%                    |
| Rated Life:        | 50000 Hours   |
| Mounting:          | Heavy gauge retention clips secures housing firmly to ceiling |
| Cut Out:           | 4 1/4"  |
| Ceiling Thickness: | 1/2" - 1"   |
| Operating Temp:    | -4°F to 104°F (-20°C to 40°C)                                 |
| Standards:         | ETL, cETL, IC   |

Fixture Type: \_\_\_\_\_


Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_



#### LINE DRAWING:

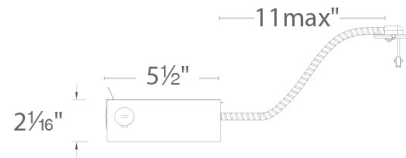

# WAC LIGHTING

## Ocularc 3.0

### New Construction Housing

#### Model

R3BNICA-10 Ocularc 3.0 LED New Construction IC-Rated Airtight Housing (120V)

R3BNICA-10U Ocularc 3.0 LED New Construction IC-Rated Airtight Housing (120-277V)

R3BNICA-10U-EM Ocularc 3.0 LED New Construction IC-Rated Airtight Housing (120-277V)

Example: **R3BNICA-10**

#### DESCRIPTION

Engineered with state of the art LED and driver technology, Ocularc 3.0, 2.0, 1.0 family of recessed lighting offers various styles, IC and Airtight Rated New Construction and Remodel, and low glare optical distributions to beautifully illuminate a diverse range of applications.

#### FEATURES

- Shallow housing under 4in depth
- Driver concealed within the fixture
- 5 year warranty

#### SPECIFICATIONS

|                    |   |
|--------------------|---|
| Construction:      | 20 gauge cold rolled steel wiring box                         |
| Power:             | 11W   |
| Input:             | 120-277 VAC, 50/60Hz, 120 VAC                                 |
| Dimming:           | ELV: 100-5% , 0-10V: 100-5%, TRIAC: 100-5%                    |
| Rated Life:        | 50000 Hours   |
| Mounting:          | Heavy gauge retention clips secures housing firmly to ceiling |
| Cut Out:           | 4 1/4"  |
| Ceiling Thickness: | 1/2" - 1"   |
| Operating Temp:    | -4°F to 104°F (-20°C to 40°C)                                 |
| Standards:         | ETL, cETL, IC, Airtight                                       |

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_



#### LINE DRAWING:

