

WAC LIGHTING

Ocularc 3.0

Remodel Housing

Model & Product

R3BBRT-10 Ocularc 3.0 LED Remodel IC-Rated Housing

Example: **R3BBRT-10**

DESCRIPTION

Engineered with state of the art LED and driver technology, Ocularc 3.0, 3.0, 1.0 family of recessed lighting offers various styles, IC and Airtight Rated New Construction and Remodel, and low glare optical distributions to beautifully illuminate a diverse range of applications.

FEATURES

- Shallow housing under 4in depth
- Driver concealed within the fixture
- 5 year warranty

SPECIFICATIONS

Construction:	20 gauge cold rolled steel wiring box
Power:	11W
Input:	120 VAC, 50/60Hz
Dimming:	ELV: 100-5% , 0-10V: 100-5%, TRIAC: 100-5%
Rated Life:	50000 Hours
Mounting:	Heavy gauge retention clips secures housing firmly to ceiling
Cut Out:	4 1/4"
Ceiling Thickness:	1/2" - 1"
Operating Temp:	-4°F to 104°F (-20°C to 40°C)
Standards:	ETL, cETL, IC, Airtight

Fixture Type: _____


Catalog Number: _____

Project: _____

Location: _____



LINE DRAWING:

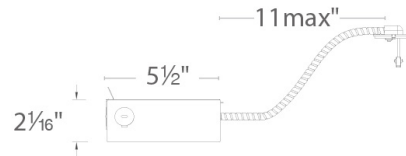

WAC LIGHTING

Ocularc 3.0

0° - 35° Adjustable Round

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Model	Beam	Color Temp & CRI	Lumens	CBCP	Finish
R3BRA	F 50°	927 2700K - 90	900	1196	BK Black BN Brushed Nickel WT White
		930 3000K - 90	970	1285	
	N 25°	927 2700K - 90	915	2513	
		930 3000K - 90	985	2701	
	S 15°	927 2700K - 90	900	4384	
		930 3000K - 90	970	4712	

Example: **R3BRA-F927-BK**

DESCRIPTION

Engineered with state of the art LED and driver technology, Ocularc 3.0, 3.0, 1.0 family of recessed lighting offers various styles, IC and Airtight Rated New Construction and Remodel, and low glare optical distributions to beautifully illuminate a diverse range of applications.

FEATURES


- Shallow housing under 4in depth
- Single spot light source
- 5 year warranty

SPECIFICATIONS


Construction:	Die-cast aluminum trim and heat sink
Power:	11W
Light Source:	Integrated LED
	3 Step Mac Adam Ellipse
Rated Life:	50000 Hours
Mounting:	Heavy gauge retention clips support trim firmly
Finish:	Electroplated:Brushed Nickel, Electroplated::Black, Electroplated::White
Operating Temp:	-4°F to 104°F (-20°C to 40°C)
Standards:	ETL, cETL, Damp Location Listed, Energy Star 2.0, Title 24 JA8 Compliant



FINISHES:



LINE DRAWING:

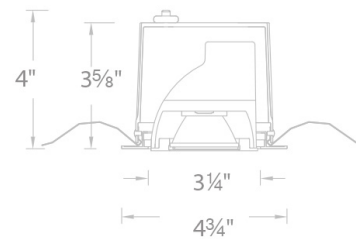

WAC LIGHTING

Ocularc 3.0

Downlight Round

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Model	Beam	Color Temp & CRI	Lumens	CBCP	Finish
R3BRD	F 50°	927 2700K - 90	900	1308	BK Black BN Brushed Nickel HZWT Haze/White WT White
		930 3000K - 90	970	1406	
	N 25°	927 2700K - 90	895	2767	
		930 3000K - 90	965	2973	
	S 15°	927 2700K - 90	895	4776	
		930 3000K - 90	965	5132	

Example: **R3BRD-F927-BK**

DESCRIPTION

Engineered with state of the art LED and driver technology, Ocularc 3.0, 3.0, 1.0 family of recessed lighting offers various styles, IC and Airtight Rated New Construction and Remodel, and low glare optical distributions to beautifully illuminate a diverse range of applications.

FEATURES


- Shallow housing under 4in depth
- Single spot light source
- 5 year warranty

SPECIFICATIONS


Construction:	Die-cast aluminum trim and heat sink
Power:	11W
Light Source:	Integrated LED
	3 Step Mac Adam Ellipse
Rated Life:	50000 Hours
Mounting:	Heavy gauge retention clips support trim firmly
Finish:	Enamel Coated:Haze/White, Enamel Coated::Brushed Nickel, Enamel Coated::Black, Enamel Coated:::White
Operating Temp:	-4°F to 104°F (-20°C to 40°C)
Standards:	ETL, cETL, Wet Location Listed, Energy Star 2.0, Title 24 JA8 Compliant



FINISHES:

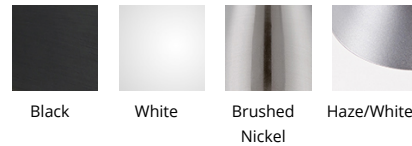

LINE DRAWING:



WAC LIGHTING

Ocularc 3.0

Polycarbonate Downlight Round

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Model	Beam	Color Temp & CRI	Lumens	CBCP	Finish
R3BRDP	F 50°	927 2700K - 90	950	1294	WT White
		930 3000K - 90	1015	1382	
	N 25°	927 2700K - 90	950	2778	
		930 3000K - 90	1025	2985	
	S 15°	927 2700K - 90	955	4918	
		930 3000K - 90	1005	5144	

Example: **R3BRDP-F927-WT**

DESCRIPTION

Engineered with state of the art LED and driver technology, Ocularc 3.0, 3.0, 1.0 family of recessed lighting offers various styles, IC and Airtight Rated New Construction and Remodel, and low glare optical distributions to beautifully illuminate a diverse range of applications.

FEATURES

- Shallow housing under 4in depth
- Single spot light source
- Conforms to local code dead front requirements
- 5 year warranty

SPECIFICATIONS

Construction:	Polycarbonate trim and die-cast aluminum heat sink
Power:	11W
Light Source:	Integrated LED 3 Step Mac Adam Ellipse
Rated Life:	50000 Hours
Mounting:	Heavy gauge retention clips support trim firmly
Finish:	Electrostatically Powder Coated: White
Operating Temp:	-4°F to 104°F (-20°C to 40°C)
Standards:	ETL, cETL, Wet Location Listed, Energy Star 2.0, Title 24 JA8 Compliant




FINISHES:



White

LINE DRAWING:



WAC LIGHTING

Ocularc 3.0

0° - 35° Adjustable Square

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Model	Beam	Color Temp & CRI	Lumens	CBCP	Finish
R3BSA	F 50°	927 2700K - 90	900	1196	BK Black BN Brushed Nickel WT White
		930 3000K - 90	970	1285	
	N 25°	927 2700K - 90	915	2513	
		930 3000K - 90	985	2701	
	S 15°	927 2700K - 90	900	4384	
		930 3000K - 90	970	4712	

Example: **R3BSA-F927-BK**

DESCRIPTION

Engineered with state of the art LED and driver technology, Ocularc 3.0, 3.0, 1.0 family of recessed lighting offers various styles, IC and Airtight Rated New Construction and Remodel, and low glare optical distributions to beautifully illuminate a diverse range of applications.

FEATURES


- Shallow housing under 4in depth
- Single spot light source
- 5 year warranty

SPECIFICATIONS


Construction:	Die-cast aluminum trim and heat sink
Power:	11W
Light Source:	Integrated LED 3 Step Mac Adam Ellipse
Rated Life:	50000 Hours
Mounting:	Heavy gauge retention clips support trim firmly
Finish:	Electroplated:Brushed Nickel, Electroplated::Black, Electroplated::White
Operating Temp:	-4°F to 104°F (-20°C to 40°C)
Standards:	ETL, cETL, Damp Location Listed, Energy Star 2.0, Title 24 JA8 Compliant



FINISHES:



LINE DRAWING:

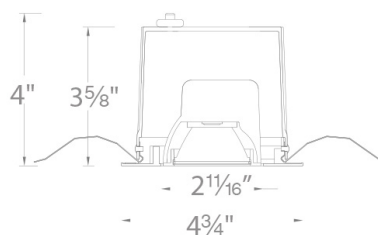

WAC LIGHTING

Ocularc 3.0

Downlight Square

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Model	Beam	Color Temp & CRI	Lumens	CBCP	Finish
R3BSD	F 50°	927 2700K - 90	850	1240	BK Black BN Brushed Nickel HZWT Haze/White WT White
		930 3000K - 90	915	1333	
		930 3000K - 90	860	2485	
	N 25°	927 2700K - 90	860	2485	
		930 3000K - 90	925	2671	
		927 2700K - 90	865	4382	
	S 15°	930 3000K - 90	930	4710	

Example: **R3BSD-F927-BK**

DESCRIPTION

Engineered with state of the art LED and driver technology, Ocularc 3.0, 2.0, 1.0 family of recessed lighting offers various styles, IC and Airtight Rated New Construction and Remodel, and low glare optical distributions to beautifully illuminate a diverse range of applications.

FEATURES


- Shallow housing under 4in depth
- Single spot light source
- 5 year warranty

SPECIFICATIONS

Construction:	Die-cast aluminum trim and heat sink
Power:	11W
Light Source:	Integrated LED 3 Step Mac Adam Ellipse
Rated Life:	50000 Hours
Mounting:	Heavy gauge retention clips support trim firmly
Finish:	Enamel Coated:Haze/White, Enamel Coated::Black, Enamel Coated::White, Enamel Coated:::Brushed Nickel
Operating Temp:	-4°F to 104°F (-20°C to 40°C)
Standards:	ETL, cETL, Wet Location Listed, Energy Star 2.0, Title 24 JA8 Compliant



FINISHES:

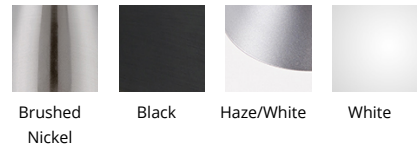

LINE DRAWING:

