

# WAC LIGHTING

## Rubix

### Single & Double Wall Mount 3000K

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

Model & Size	Color Temp & CRI	Watt	Lumens	Finish	
Light Lights	WS-W2504 5" - 1	3000K 90	16W	945	AL Brushed Aluminum
	WS-W2505 5" - 2	3000K 90	31W	1890	BK Black BZ Bronze GH Graphite WT White

Example: **WS-W2504-AL**

#### DESCRIPTION

Available in single and twin light configurations, this die-cast aluminum LED wall luminaire is Wet Location listed for a broad range of exterior lighting applications. Designed with asquare profile, this version of Rubix mounts upwards or downwards.

#### FEATURES

- 2504 Single, 2505 Double
- Driver concealed within the fixture
- 5 year warranty

#### SPECIFICATIONS

**Construction:** Die-cast Aluminum

**Power:** 16W, 31W

**Input:** 120-277V, 50/60Hz

**Dimming:** ELV: 100-10% , 0-10V: 100-5%

**Light Source:** Integrated LED

**Rated Life:** 70000 Hours

**Mounting:** Mounts directly to junction box, Can be mounted on wall in all orientations


**Finish:** Powder Coat Bronze:Bronze, Powder Coat Bronze::Black, Powder Coat Bronze::Brushed Aluminum, Powder Coat Bronze:::White, Powder Coat Bronze:::Graphite, Powder Coat White:White, Powder Coat White::Graphite, Powder Coat White:::Bronze, Powder Coat White:::Black, Powder Coat White:::Brushed Aluminum

**Operating Temp:** -40°F to 122°F (-40°C to 50°C)

**Standards:** ETL, cETL, Wet Location Listed, IP65, Title 24 JA8 Compliant



#### FINISHES:

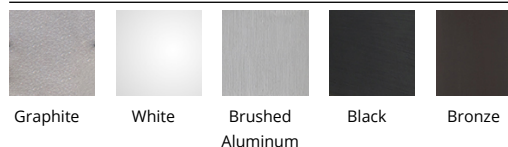

#### LINE DRAWING:



WS-W2504, WS-W2505