

WAC LIGHTING

Rubix

Wall Mount 3000K

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Model & Size	Color Temp & CRI	Watt	Lumens	Finish
WS-W2509 10" - 1 Light	3000K 90	15W	968	AL Brushed Aluminum
WS-W2510 10" - 2 Lights	3000K 90	30W	1385	BK Black BZ Bronze GH Graphite WT White

Example: **WS-W2509-AL**

DESCRIPTION

Available in single and twin light configurations, this die-cast aluminum LED wall luminaire is Wet Location listed for a broad range of exterior lighting applications. Designed with asquare profile, this version of Rubix mounts upwards or downwards.

FEATURES


- 2509 Single, 2510 Double
- Driver concealed within the fixture
- 5 year warranty

SPECIFICATIONS

Construction:	Die-cast Aluminum
Power:	15W, 30W
Input:	120-277V, 50/60Hz
Dimming:	ELV: 100-10% , 0-10V: 100-5%, ELV: 100-10% , 0-10V: 100-10%, TRIAC: 100-10%
Light Source:	Integrated LED
Rated Life:	70000 Hours
Mounting:	Mounts directly to junction box, Can be mounted on wall in all orientations
Finish:	Powder Coat White:White, Powder Coat White::Graphite, Powder Coat White:::Bronze, Powder Coat White:::Brushed Aluminum, Powder Coat White:::Black, Brushed Aluminum with Clear Powder Coat:Brushed Aluminum, Brushed Aluminum with Clear Powder Coat::White, Brushed Aluminum with Clear Powder Coat:::Black, Brushed Aluminum with Clear Powder Coat:::Bronze, Brushed Aluminum with Clear Powder Coat:::Graphite
Operating Temp:	-40°F to 122°F (-40°C to 50°C)
Standards:	UL, cUL, Wet Location Listed, IP65, Title 24 JA8 Compliant, ADA



FINISHES:

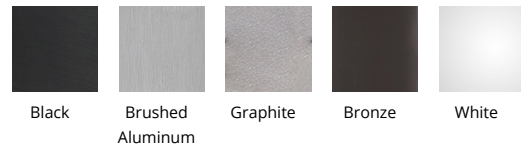

LINE DRAWING:

