

WAC LIGHTING

Swerve

Chandelier 4CCT

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

| Model & Size | Color Temp | Finish | LED Watts | LED Lumens | Delivered Lumens |
|--------------|------------|----------|-----------|------------|------------------|
| PD-67426 26" | 2700K | BK Black | 20 W | 2100 | 1260 |
| | 3000K | | 20 W | 2100 | 1260 |
| | 3500K | | 20 W | 2100 | 1260 |
| | 4000K | | 20 W | 2100 | 1260 |

Example: **PD-67426-40-BK**

For custom requests please contact customs@wacighting.com

DESCRIPTION

Fluid circles of black and light twist within each other, casting diffused LED illumination in all directions.

FEATURES

- Low profile, adjustable powered aircraft cables for an ultra-clean look
- May be mounted on slope ceiling
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Option to pre-select color temperature or adjust in the field
- Spin-on round canopy with minimal hardware
- Driver concealed within the canopy

SPECIFICATIONS

| | |
|---------------|-----------------------------------|
| Color Temp: | 3500K,2700K,3000K,4000K |
| Input: | 120-277V,50/60Hz |
| CRI: | 90 |
| Dimming: | ELV: 100-10% ,TRIAC: 100-5% |
| Rated Life: | 50000 Hours |
| Standards: | ETL, cETL Damp Location Listed |
| Construction: | Aluminum body, silicone diffuser |




FINISHES:



Black

LINE DRAWING:

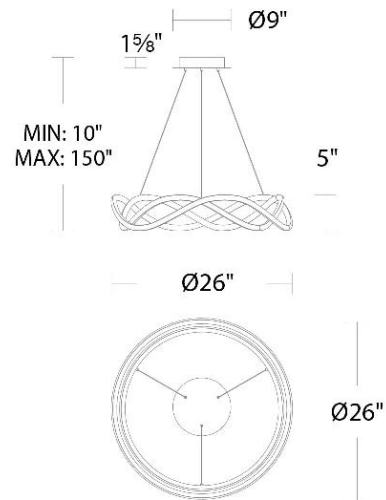

PD-67426