

WAC LIGHTING

VENTRIX

Indirect Element

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Model & size	Power	Watt	Beam	Color Temp & CRI	Delivered Lumens	
S2ID12 12"	1	6W	F	927 2700K - 90	400	
	1	6W	F	930 3000K - 90	420	
	1	6W	F	935 3500K - 90	450	
	1	6W	F	940 4000K - 90	460	
	2	9W	F	930 3000K - 90	640	
	2	9W	F	935 3500K - 90	670	
	2	9W	F	940 4000K - 90	680	
	3	12W	F	927 2700K - 90	810	
	3	12W	F	930 3000K - 90	850	
	3	12W	F	935 3500K - 90	900	
	3	12W	F	940 4000K - 90	910	
	S2ID24 24"	1	12W	F	927 2700K - 90	810
		1	12W	F	930 3000K - 90	850
		1	12W	F	935 3500K - 90	890
		1	12W	F	940 4000K - 90	910
2		18W	F	930 3000K - 90	1280	
2		18W	F	935 3500K - 90	1340	
2		18W	F	940 4000K - 90	1360	
3		24W	F	927 2700K - 90	1620	
3		24W	F	930 3000K - 90	1700	
3		24W	F	935 3500K - 90	1790	
3		24W	F	940 4000K - 90	1820	
S2ID48 48"		1	24W	F	927 2700K - 90	1620
		1	24W	F	930 3000K - 90	1700
		1	24W	F	935 3500K - 90	1790
		1	24W	F	940 4000K - 90	1820
	2	36W	F	927 2700K - 90	2430	
	2	36W	F	930 3000K - 90	2560	
	2	36W	F	935 3500K - 90	2680	
	2	36W	F	940 4000K - 90	2730	
	3	48W	F	927 2700K - 90	3240	
	3	48W	F	930 3000K - 90	3410	
	3	48W	F	935 3500K - 90	3580	
	3	48W	F	940 4000K - 90	3650	

Example: **S2ID12-1-F927**

DESCRIPTION


The only lighting, power, and control system complete with lighting elements designed for discriminating performance. Configure VENTRIX for your retail, restaurant, commercial office, or residential lighting plan.

FEATURES

- May be field cut every 2" at the end of a run
- One S2ID-DR96 indirect driver required per 96W of indirect elements
- 5 year warranty

SPECIFICATIONS

Construction:	Heavy duty aluminum printed circuit board
Power:	6W, 9W, 12W, 18W, 24W, 36W, 48W
Input:	48 VDC
Dimming:	ELV: 100-0.1% , 0-10V: 100-0.1%, TRIAC: 100-0.1%
Light Source:	Integrated LED 3 Step Mac Adam Ellipse
Rated Life:	50000 Hours
Mounting:	Installs into VENTRIX system
Operating Temp:	-4°F to 104°F (-20°C to 40°C)
Standards:	UL, cUL, Dry Location Listed, Title 24 JA8 Compliant

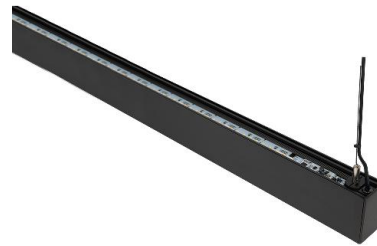


LINE DRAWING:


WAC LIGHTING



S2ID12



S2ID24



S2ID48

WAC LIGHTING

VENTRIX

Indirect Element Driver

Model & Product

S2ID-DR96 VENTRIX Indirect luminaire
Driver 96W

Example: **S2ID-DR96**

DESCRIPTION

The only lighting, power, and control system complete with lighting elements designed for discriminating performance. Configure VENTRIX for your retail, restaurant, commercial office, or residential lighting plan.

FEATURES

- Installs in top side of channel to power and provide individual addressability to Indirect Elements.
- Required per run of Indirect Elements up to 96W max
- Driver concealed within the fixture
- 5 year warranty

SPECIFICATIONS

Construction:	Injection molded polycarbonate
Input:	48 VDC
Rated Life:	50000 Hours
Mounting:	Installs into VENTRIX system
Operating Temp:	-4°F to 104°F (-20°C to 40°C)
Standards:	UL, cUL, Dry Location Listed, 2019

Fixture Type: _____


Catalog Number: _____

Project: _____

Location: _____



LINE DRAWING:

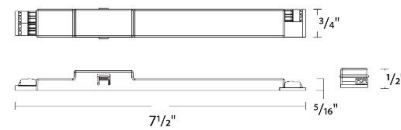

WAC LIGHTING

VENTRIX

Indirect Element




Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

ACCESSORIES

	<i>Model</i>	<i>Description</i>	<i>Finish</i>
	LENS-S2ID96-BW	VENTRIX	Batwing
	LENS-S2ID96-CL	VENTRIX	Clear
	LENS-S2ID96-FR	VENTRIX	Frosted