

WAC LIGHTING

Vertigo

Outdoor Wall Sconce 3000K

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
WS-W34712 12"	3000K	BK Black	12W	700	600

Example: **WS-W34712-BK**

For custom requests please contact customs@wacighting.com

DESCRIPTION

Spellbinding style with a Mid-Century modern touch. Vertigo features a mouth blown etched opal glass with solid die-cast aluminum hardware that is weather resistant with a powdercoated finish. The light engine is factory sealed for maximum protection against the harshest elements.

FEATURES

- Weather-resistant powder coated finish
- Light engine is factory sealed for maximum protection from the elements
- ACLED driverless technology
- 5 year warranty

SPECIFICATIONS

Color Temp:	3000K
Input:	120 VAC,50/60Hz
CRI:	90
Dimming:	ELV: 100-10%
Rated Life:	54000 Hours
Mounting:	Can be mounted on wall vertically or upside down
Standards:	ETL, cETL,IP65 Wet Location Listed
Construction:	Aluminum hardware with mouth blown etched glass diffuser




FINISHES:



Black

LINE DRAWING:

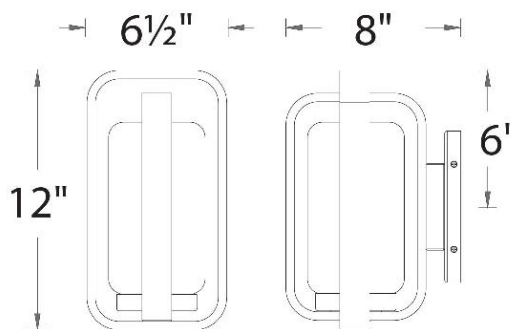

WS-W34712

WAC LIGHTING

Vertigo

Outdoor Wall Sconce 3000K

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
WS-W34714 14"	3000K	BK Black	12W	755	725

Example: **WS-W34714-BK**

For custom requests please contact customs@wacighting.com

DESCRIPTION

Spellbinding style with a Mid-Century modern touch. Vertigo features a mouth blown etched opal glass with solid die-cast aluminum hardware that is weather resistant with a powdercoated finish. The light engine is factory sealed for maximum protection against the harshest elements.

FEATURES

- Weather-resistant powder coated finish
- Light engine is factory sealed for maximum protection from the elements
- ACLED driverless technology
- 5 year warranty

SPECIFICATIONS

Color Temp:	3000K
Input:	120 VAC,50/60Hz
CRI:	90
Dimming:	ELV: 100-10%
Rated Life:	54000 Hours
Mounting:	Can be mounted on wall vertically or upside down
Standards:	ETL, cETL,IP65 Wet Location Listed
Construction:	Aluminum hardware with mouth blown etched glass diffuser




FINISHES:



Black

LINE DRAWING:

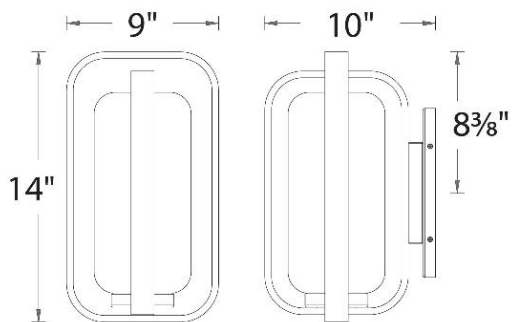

WS-W34714