### **ARCHETYPE** 12V/120V/277V LED BOLLARD



6641/6642/6643

### LANDSCAPE LIGHTING



Fixture Type:	
Catalog Numbe	r:
Project:	
Location:	

#### **PRODUCT DESCRIPTION**

Sleek linear design blends seamlessly into pathways while providing soft, even illumination

#### **FEATURES**

- IP66 rated, Protected against powerful water jets
- · Factory sealed water tight fixtures
- Mounting accessories included
- UL & cUL 1838 Listed (12V); 1598 Listed (120V/277V)

Model	Model Color Temp		Finishes		
6641	12V	27 30	2700K Warm White 3000K Pure White	BZ BK	Bronze on Aluminum Black on Aluminum
6642	120V	27 30	2700K Warm White 3000K Pure White	BZ BK	Bronze on Aluminum Black on Aluminum
6643	277V	27 30	2700K Warm White 3000K Pure White	BZ BK	Bronze on Aluminum Black on Aluminum

6643- BZ

Example: 6643-30BZ

#### **SPECIFICATIONS**

6641

**Input:** 9-15VAC (Transformer is required)

Power: 5.5W / 6.0VA Brightness: Up to 150 lm

**CRI:** 90

Rated Life: 60,000 hours
Dimming: MLV dimming only

6642

 Input:
 120V

 Power:
 12.5W

 Brightness:
 Up to 390 lm

 CRI:
 90

Rated Life: 60,000 hours

**Dimming:** TRIAC or ELV dimming

6643

 Input:
 277V

 Power:
 10.5W

 Brightness:
 Up to 430 lm

 CRI:
 90

Rated Life: 60,000 hours
Dimming: ELV dimming only



waclighting.com Phone (800) 526.2588 Fax (800) 526.2585 Headquarters/Eastern Distribution Center 44 Harbor Park Drive Port Washington, NY 11050 Central Distribution Center 1600 Distribution Ct Lithia Springs, GA 30122 Western Distribution Center 1750 Archibald Avenue Ontario, CA 91760

## **ARCHETYPE** 12V/120V/277V LED BOLLARD




### 6641/6642/6643

# LANDSCAPE LIGHTING

• Recommended spacing for installation :


6641 (12V)

Residential: 11.5 to 14ft Commercial: 7 to 9ft

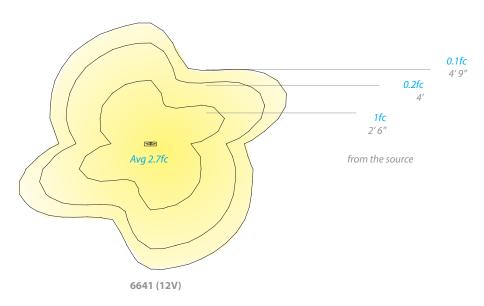

• Recommended spacing for installation :

6642, 6643 (120V, 277V) Residential: 12.5 to 14.5ft Commercial: 8 to 9.5ft

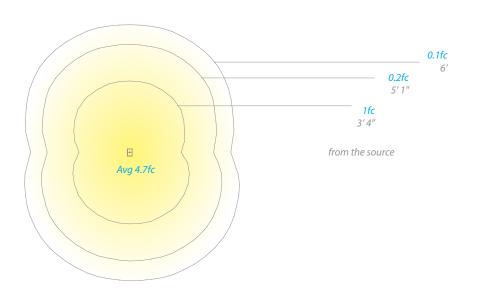

6642, 6643 (120V, 277V)