
# **TERMINATOR UV**

# F-069U

60" Ceiling Fan





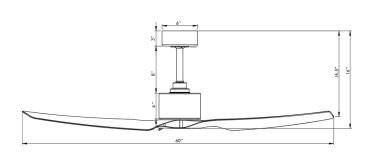

#### **PRODUCT DESCRIPTION**

Terminator UV uses a patent-pending system, which combines a UV-C LED ring with a powerful fan.

#### **FEATURES**

- 6 fan speeds through both Summer and Winter Modes
- Silent DC motor
- Includes remote control with wall cradle (RCUV-WT)
- · Wall control for 3, 4-way control sold separately
- Compatible with WAC Smart Fans app
- Includes violet LED indicators to let you know the UV-C Module is on

# **AIRFLOW/ENERGY EFFICIENCY**

Weighted-Average/High Airflow CFM: 4104/6148 Weighted-Average/High Energy Use (W): 20/26 Estimated Yearly Energy Cost (\$): 6 Weighted-Average/High Efficiency (CFM/W): 201 Max RPM: 142

## **ORDER NUMBER**

Model	Housi	ng	Blade	Blade				
F-069U	MB	Matte Black	MB	Matte Black				
	MW	Matte White	MW	Matte White				

F-069U-

Example: F-069U-MB

### **SPECIFICATIONS**

**Construction:** Aluminum, ABS Blade: 16° Pitch, 60" sweep Downrod: 3/4"W X 8"H included

Up to 30° **Mounting Slope:** Wire: 80" **Hanging Weight:** 16 lbs **Total Power:** 42.5W

Standards: UL/cUL Damp Location listed, Title 20

Compliant, Energy Star Rated, EPA Est. No.

100431-CHN-1

**Motor Type:** DC 120 x 25 sensorless DC motor

#### **WIRELESS PERFORMANCE**

Wi-Fi Range: Up to 150 ft (Results may vary based on

application and surroundings)

Up to 150 ft (Results may vary based on **Bluetooth Range:** 

application and surroundings)

## **UV-C LED PERFORMANCE**

UV-C LED Modules (only operate when the fan **Light Source:** 

is spinning

**Light Wattage:** 16.5W Dimming: N/A Peak wavelength: 275 nm

Maintenance: Your module will flash when it has

80-hours left of life.

The WAC app synchronizes seamlessly with smart home devices you already own













waclighting.com Phone (800) 526.2588 (800) 526.2585

Headquarters/Eastern Distribution Center Central Distribution Center 44 Harbor Park Drive Port Washington, NY 11050

1600 Distribution Ct Lithia Springs, GA 30122 Western Distribution Center 1750 Archibald Avenue Ontario, CA 91760

# **TERMINATOR UV**

# F-069U

60" Ceiling Fan



# **OPTIONAL ACCESSORIES**

OPTIONAL ACCESSORIES					
Bluetooth Remote Control	(a) (b) (c) (c) (c) (c) (c) (c) (c) (c) (c) (c	RCUV-	WT	White	Control fan speed, reversability, and power On the UV-C module.
Downrod		DR12- 12IN DR18- 18IN DR24- 24IN DR36- 36IN DR48- 48IN DR60- 60IN DR72- 72IN			All our downrods are 1" O.D. and are threaded on the motor end to create an extra layer of security and allow for adjustments in the field.
Downrod Couplers		DC-	MB MW	Matte Black Matte White	Connects two downrods together.
Sloped Ceiling Kit		SC-			Designed to accommodate buildings with steeper sloped ceilings up to 450 or 12/12 pitch.

Examples: Remote Control - RCUV-WT, Downrod - DR12-BN, Downrod Coupler - DC-MB, Sloped Ceiling Kit - SC-MW

### SUGGESTED DOWNROD HEIGHT USAGE

Ceiling Height	15'	14'	13'	12'	11'	10'	9'
Downrod	72"	60"	48"	36"	24"	18"	12"

## SLOPED CEILING DEGREE CONVERSION CHART

Degree	4-8°	9-13°	14-17°	18-21°	22-25°	26-29°	30-32°	33-35°	36-38°	39-41°	42-44°	45°
Ceiling Slope	1/12	2/12	3/12	4/12	5/12	6/12	7/12	8/12	9/12	10/12	11/12	12/12
Pitch	pitch	pitch	pitch	pitch	pitch	pitch	pitch	pitch	pitch	pitch	pitch	pitch

Supplied mounting brackets allow mounting on ceiling slopes up to 30° (7/12 pitch). Optional slope kit allows mounting on ceilings up to 45° (12/12 pitch). The receiver will mount inside canopy up to 45°.

NOTE: Recommended maximum downrod length of 72" with 80" lead wire

**Disclaimer:** WAC Lighting makes no claims that its products can cure, treat or prevent any conditions, including COVID-19 or other conditions that may be caused by airborne pathogens. Always consult your healthcare provider with any health-related questions.