
# ROTARY

F-099L

65" Ceiling Fan





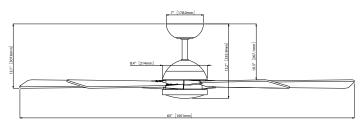

#### **PRODUCT DESCRIPTION**

A sleek modern design incorporating unpretentious, stylish aesthetic, with a focus on simplicity and minimalism. Blends seamlessly into any any interior or exterior setting. Utilizes a powerful 6-speed operation with an integrated LED luminaire for cost-saving efficiency and luminosity.

#### **FEATURES**

- 6 fan speeds through both Summer and Winter Modes
- · Silent DC motor
- · Luminaire cover not included
- Includes remote control with wall cradle (RC20-WT)
- · Wall control for 3, 4-way control sold separately
- Compatible with WAC Smart Fans app

## AIRFLOW/ENERGY EFFICIENCY

Weighted-Average/High Airflow CFM: 4717/7018 Weighted-Average/High Energy Use (W): 25/38 Estimated Yearly Energy Cost (\$): 7 Weighted-Average/High Efficiency (CFM/W): 185 Max RPM: 128

#### **ORDER NUMBER**

Model	Hous	ing	Blade	Blade Arm				
F-099L	MB MB	Matte Black Matte Black	BN SB	Brushed Nickel Soft Brass				
	IVID	matte Black		30jt Br 433				

## F-099L-

Example: F-099L-MB/SB

\*This fan comes uni-pack - blade select options are not available

\* Range results may vary based on application and surroundings.

#### **SPECIFICATIONS**

Aluminum, ABS **Construction:** Blade: 14° Pitch, 65" sweep Downrod: 3/4"W X 6"H included

**Mounting Slope:** Up to 30° Wire: 80" **Hanging Weight:** 21 lbs 58W **Total Power:** 

Standards: UL/cUL Wet Location listed, Title 24 JA8-2016,

Title 20, Energy Star

**Motor Type:** DC 120 x 25

## **WIRELESS PERFORMANCE**

Wi-Fi Range: Up to 150 ft\* **Bluetooth Range:** Up to 150 ft\*

### **LUMINAIRE PERFORMANCE**

LED **Light Source: Light Wattage:** 19.5W Lumens/Delivered: 1600/1200 Dimming: Integrated CRI: 90

**CCT Color Temperature:** 2700K, 3000K, 4000K, 5000K (selectable)

**Rated Life:** 50,000 hours

The WAC app synchronizes seamlessly with smart home devices you already own













waclighting.com Phone (800) 526.2588 (800) 526.2585

Headquarters/Eastern Distribution Center Central Distribution Center 44 Harbor Park Drive Port Washington, NY 11050

1600 Distribution Ct Lithia Springs, GA 30122 Western Distribution Center 1750 Archibald Avenue Ontario, CA 91760

# **ROTARY**

# F-099L

65" Ceiling Fan



## **OPTIONAL ACCESSORIES**

OPTIONAL ACCESSORIES		,		
Bluetooth Wall Control	WC20-	wt	White	Control fan speed and light brightness, and switch between Summer and Winter Modes. Additional Wall Controls can be purchased separately for multiple location control.
Bluetooth Remote Control	RC20-	wT	White	Control fan speed and light brightness, and switch between Summer and Winter Modes. Compatible with WAC Smart Fans. Includes easy-to-install wall cradle and batteries.
Downrod	DR12- 12IN DR18- 18IN DR24- 24IN DR36- 36IN DR48- 48IN DR60- 60IN DR72- 72IN			All our downrods are .75 (in) and are threaded on the motor end to create an extra layer of security and allow for adjustments in the field.
Downrod Couplers	DC-	MB MW SB	Matte Black Matte White Soft Brass	Connects two downrods together.
Sloped Ceiling Kit	SC-			Designed to accommodate buildings with steeper sloped ceilings up to 450 or 12/12 pitch.

Examples: Wall Control - WC20-WT, Remote Control - RC20-WT, Downrod - DR12-BN, Downrod Coupler - DC-MB, Sloped Ceiling Kit - SC-MW

## SUGGESTED DOWNROD HEIGHT USAGE

Ceiling Height	15'	14'	13'	12'	11'	10'	9'
Downrod	72"	60"	48"	36"	24"	18"	12"

## **SLOPED CEILING DEGREE CONVERSION CHART**

Degree	4-8°	9-130	14-17o	18-21o	22-25o	26-290	30-320	33-350	36-380	39-41o	42-440	450
Ceiling Slope	1/12	2/12	3/12	4/12	5/12	6/12	7/12	8/12	9/12	10/12	11/12	12/12
Pitch	pitch	pitch	pitch	pitch	pitch	pitch	pitch	pitch	pitch	pitch	pitch	pitch

Supplied mounting brackets allow mounting on ceiling slopes up to 30° (7/12 pitch). Optional slope kit allows mounting on ceilings up to 45° (12/12 pitch). The receiver will mount inside canopy up to 45°.

NOTE: Recommended maximum downrod length of 72" with 80" lead wire