


# AETHER ATOMIC

## R1ARARL, R1ASARL - Round and Square Trimless Adjustable Housing

# WAC

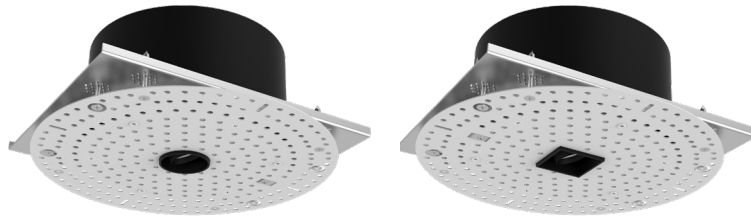

Fixture Type:

Catalog Number:

Project:

Location:

### PRODUCT DESCRIPTION

Minuscule and mighty, peerless and powerful, the new potent Aether Atomic launches into the light. An engineering recessed marvel for next generation futurists. Sublime and serviceable, it's an icon for the ages. Atomic breaks the mold with robust illumination from a diminutive aperture, for a clean, quiet ceiling.

### FEATURES

- Low profile housing for installation in shallow plenums
- High quality stainless steel spackle frame for long lasting durability
- 0 - 25° vertical tilt and 365° horizontal rotation (requires R1A-TOOL, sold separately)
- Replaceable LED Light Engine
- Frame-In kit optional for new construction installation
- 5 year warranty

### SPECIFICATIONS

- Construction:** Durable die-cast aluminum housing with stainless steel spackle frame
- Dimming:** 100% - 1% ELV, TRIAC and 0-10V
- Input Power:** 11W
- Light Source:** High output COB LED rated life of 50,000 hours
- Mounting:** Remodel - Fastened to aluminum ceiling plate with sheetrock screws. Ceiling cutout: 6 1/2" Dia. New Construction - Fastened to frame-in kit with sheetrock screws. Ceiling cutout: 6" Dia.
- Ceiling thickness:** 1/2" - 2"
- Standards:** ETL & cETL Damp location listed, IC rated Airtight Title 24 JA8 Compliant

Housings (Order Trim and Power Supply Separately)

	Model	Power	Color Temp	CRI
	<b>R1ARARL</b> Round Trimless IC-Rated, Airtight	11W	<b>927</b> 2700K	90
			<b>930</b> 3000K	
			<b>935</b> 3500K	
			<b>940</b> 4000K	
	<b>R1ASARL</b> Square Trimless IC-Rated, Airtight	11W	<b>927</b> 2700K	90
			<b>930</b> 3000K	
			<b>935</b> 3500K	
			<b>940</b> 4000K	

### R1A \_\_\_ - \_\_\_

Example: **R1ARARL-927**

Please see next page for housing, power supply and tool units (required)

wacighting.com	Headquarters, East Manufacturing Facility	South East Manufacturing Facility	Central Manufacturing Facility	West Manufacturing Facility
Phone (800) 526.2588	44 Harbor Park Drive	1600 Distribution Ct	1700 South J Elmer Freeway, Ste 100	1750 S Archibald Ave
Fax (800) 526.2585	Port Washington, NY 11050	Lithia Springs, GA 30122	Cedar Hill, TX 75104	Ontario, CA 91761

## R1ARARL, R1ASARL - Round and Square Trimless Adjustable Housing

Frame-In Kit (Optional) - Order separately from housings

	Model	Description
	<b>R1ABFL</b>	Frame-In kit for new construction installations

Example: **R1ABFL**

Remote Power Supply (Required) - Order separately from trims and housings

	Model	Input	Output	Dimmable	
	<b>PS-0600A-UR1</b>	120V - 277V	1 Channel UL Class 2	100%-1% ELV, TRIAC, 0-10V	8 3/4" x 2" x 1 3/8"
	<b>PS-0600A-UR6</b>	120V - 277V	6 Channels UL Class 2	100%-1% ELV, TRIAC, 0-10V	10 7/8" x 3 7/8" x 1 3/8"

Example: **PS-0600A-UR6**

Home-run wiring. Recommended maximum distance between power supply and compatible light fixture is shown in below table:

	18 AWG	16 AWG	14 AWG	12 AWG
Maximum distance between power supply and light fixture	100 ft	150 ft	200 ft	250 ft

Accessory (Sold Separately)

	Model	Description
	<b>R1A-TOOL</b>	Tool for angle adjustment and removal of trim and light engine

Example: **R1A-TOOL**

Replacement Light Engine

RPL-R1A-MOD-927  
RPL-R1A-MOD-930  
RPL-R1A-MOD-935  
RPL-R1A-MOD-940

Example: **RPL-R1A-MOD-930**