TRIMMED HOUSING

2" Volta

WAC LIGHTING

Responsible Lighting®

SPECIFICATIONS

Input: Universal 120 - 277V AC 50/60 Hz

Standards: ETL & cETL, Chicago Plenum, IC-rated, Airtight (see below for list)

Dimming: Electronic Low Voltage (ELV): 100%-5%

0-10V: 100%-0%

Lutron Hi-Lume 1% Ecosystem Fade-to-Black option

Emergency: EM fixtures provided with integral Emergency battery back up with

24" lead wire remote test switch. Provides at least 90 minutes of 8W

illumination during emergency operation.

Mounting: New construction housings included with universal mounting

brackets and hanger bars Ceiling cut out (Round): Ø 3 %6" Ceiling cut out (Square): 3 %6" x 3 %6"

See next page for ceiling thickness information

Fixture Type:

Catalog Number:


Project:


Location:


Construction: 20 Gauge cold rolled steel

Warranty: 5 year WAC Lighting product warranty









HOUSINGS

waclighting.com

Phone (800) 526.2588

(800) 526.2585

	Model		Power*	S	N, F,W, A	Rating	Driver	Emer	gency Backup	Compatible Trims
Round New Construction	R2RNT R2RCT	Airtight Airtight, Chicago Plenum	15 22	10W 15W	15W 22W	IC rated IC rated	DEFAULT ELV, 0-10V L1 Lutron Hi-Lume 1%	EM	Emergency backup battery (OPTIONAL)	R2RD2T R2RD1T R2RAT R2RWT R2RPT
Square New Construction	R2SNT R2SCT	Airtight Airtight, Chicago Plenum	15 22	10W 15W	15W 22W	IC rated IC rated	DEFAULT ELV, 0-10V L1 Lutron Hi-Lume 1%	EM	Emergency backup battery (OPTIONAL)	R2SD2T R2SD1T R2SAT R2SWT R2SPT
Remodel	R2BRT	Round or Square	15 22	10W 15W	15W 22W	Non-IC Non-IC	DEFAULT ELV, 0-10V		N/A	R2RD2T, R2SD2T R2RD1T, R2SD1T R2RAT, R2SAT R2RWT, R2SWT, R2RPT, R2SPT

*Power consumption depends on beam angle of the trim.

R2____-

Example: R2RNT-15 or R2RNT-15EM (with Emergency backup battery)

Headquarters/Eastern Distribution Center 44 Harbor Park Drive Port Washington, NY 11050 **Central Distribution Center** 1600 Distribution Ct Lithia Springs, GA 30122

Field Replaceable Driver

D-R2N3-15

D-R2N3-22

Western Distribution Center 1750 Archibald Avenue Ontario, CA 91760

Driver for 15W New Construction Hsg

Driver for 22W New Construction Hsg

1

TRIMMED HOUSING


2" Volta

WAC LIGHTING

Responsible Lighting®


TRIMMED INSTALLATION

		Ceiling Thickness			
Trim Model	Trim Description	1/2"	1"	1 1/2"	
R2RD2T R2SD2T	Downlight	Yes	Yes	Yes	
R2RD1T R2SD1T	Shallow Regressed Downlight	Yes	Yes	Yes	
R2RAT/ R2RPT R2SAT/ R2SPT	Adjustable/ Pinhole	Yes, to 45°	Yes, to 35°	Yes, to 20°	
R2RWT R2SWT	Wall Wash		Yes	No	

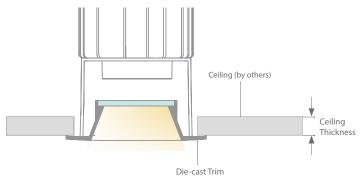

WOOD AND METAL CEILING INSTALLATION



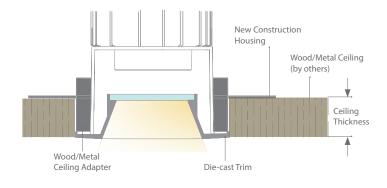

Ceiling Thickness Adapter Trim Trim Model Model 1/2" 1" 1 1/2" Description R2RD2T Downlight Yes Yes N/A R2RD1T R2R-ADP1 Round **R2RWT** Wall Wash N/A Yes Yes Up to1" R2RAT Adjustable/Pinhole Yes, to 45° Yes, to 45° N/A R2RPT R2RD2T Downlight Yes Yes Yes R2RD1T R2R-ADP2 **R2RWT** Wall Wash Round No No No Up to 11/2" **R2RAT** Adjustable/Pinhole Yes, to 30° Yes, to 30° Yes, to 30° R2RPT R2SD2T Downlight N/A Yes Yes R2SD1T R2S-ADP1 **R2SWT** Wall Wash Square Yes Yes N/A Up to1" **R2SAT** Adjustable/Pinhole Yes, to 45° N/A Yes, to 45° R2SPT R2SD2T Downlight Yes Yes Yes R2SD1T R2S-ADP2 Square **R2SWT** Wall Wash No No No Up to 11/2" **R2SAT** Adjustable/Pinhole Yes, to 30° Yes, to 30° Yes, to 30° **R2SPT**

WOOD AND METAL CEILING ADAPTERS



Round

R2R-ADP1 ½" to 1" ceiling thickness

R2R-ADP2 1" to 1½" ceiling thickness

R2S-ADP1 ½"to 1"ceiling thickness
R2S-ADP2 1"to 1½"ceiling thickness

waclighting.com Phone (800) 526.2588 Fax (800) 526.2585 Headquarters/Eastern Distribution Center 44 Harbor Park Drive Port Washington, NY 11050 Central Distribution Center 1600 Distribution Ct Lithia Springs, GA 30122 Western Distribution Center 1750 Archibald Avenue Ontario, CA 91760