

OCULARC 3.5 DIM-TO-WARM

Adjustable Pinhole - R3CSPT, R3CSPL

WAC LIGHTING




Fixture Type:

Catalog Number:

Project:

Location:

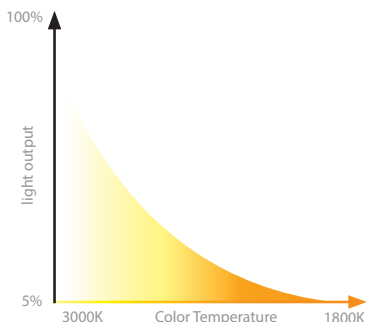

PRODUCT DESCRIPTION

The brilliant LED recessed downlight that gradually changes to a warmer color temperature as you dim. Great for new construction projects or remodels.

FEATURES

- 2 beam angle options included:
Narrow flood beam pre-installed, interchangeable flood beam film supplied
- Non IC and IC-Rated, Airtight, New Construction, Remodel
- Adjustable LED light engine included with housing:
Vertical Adjustment 0-30°, Horizontal Adjustment 365°
- Shallow housing under 4" depth
- 5 year warranty

SPECIFICATIONS

- Construction:** Die-cast aluminum trim and heat sink
- Input Power:** 13W/16W, 120V-277V 50/60Hz
- Dimming:** 100% - 1% TRIAC, ELV
100% - 5%, 0-10V
- Light Source:** CRI 95 high output COB LED rated life of 50,000 hours
- Mounting:** Retention clips firmly hold trim to housing. Cutout 4 1/4" x 4 1/4"
- Finish:** Powder coated white.
- Ceiling thickness:** 1/2" - 1"
- Operating Temp:** -4°F to 104°F (-20°C to 40°C)
- Standards:** UL & cUL, Wet Location listed, Title 24 JA8-2019 Compliant

Trims (Order Housing Separately)	Model	Power	Beam	Color Temp	Max Lumens	Max CBCP	Finish
	R3CSPT Square Trim Adjustable Pinhole	13W	Narrow Flood 32° Flood 54°	3000K - 1800K	795	2165	WT White BK Black
		16W	Narrow Flood 32° Flood 54°		600	625	
	R3CSPL Square Trimless Adjustable Pinhole	13W	Narrow Flood 32° Flood 54°		795	2165	
		16W	Narrow Flood 32° Flood 54°		600	625	
		13W	Narrow Flood 32° Flood 54°	940	2530		
		16W	Narrow Flood 32° Flood 54°	710	740		

Example: **R3CSPL-WT**

wacighting.com

Phone (800) 526.2588
Fax (800) 526.2585

Headquarters/Eastern Distribution Center

44 Harbor Park Drive
Port Washington, NY 11050

Central Distribution Center

1600 Distribution Ct
Lithia Springs, GA 30122

Western Distribution Center

1750 Archibald Avenue
Ontario, CA 91760

OCULARC 3.5 DIM-TO-WARM

Adjustable Pinhole - R3CSPT, R3CSPL

WAC LIGHTING

Housing (Required) - Order separately from trims

Model

Power

Color Temp

	<p>R3CSN-13 IC-Rated Airtight</p>	<p>13W</p>	<p>WD</p>	<p>3000K-1800K</p>
	<p>R3CSR-16 Non IC Airtight</p>	<p>16W</p>	<p>WD</p>	<p>3000K-1800K</p>
	<p>R3CSRL-16 Non IC Airtight</p>	<p>16W</p>	<p>WD</p>	<p>3000K-1800K</p>

R3CS__-__-WD

Example: **R3CSN-13-WD**

wacighting.com
Phone (800) 526.2588
Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive
Port Washington, NY 11050

Central Distribution Center
1600 Distribution Ct
Lithia Springs, GA 30122

Western Distribution Center
1750 Archibald Avenue
Ontario, CA 91760

WAC Lighting retains the right to modify the design of our products at any time as part of the company's continuous improvement program.