R4RWT, R4SWT

4.5" Volta - Wallwash Trim

WAC LIGHTING

Responsible Lighting®



PRODUCT DESCRIPTION

Volta LED downlight series represents an innovation in design and technology for architectural lighting. This high lumen and adaptable family of fixtures with a comprehensive set of round and square fittings, affords a sustainable solution for commercial, corporate, and upscale residential applications.

FEATURES

- Dual finishes are single piece, no physical seams
- Innovative bi-directional spread lens
- Engineered for even wall illumination both vertically and horizontally
- 5 year WAC Lighting product warranty

SPECIFICATIONS

Construction: Durable die-cast self flanged aluminum construction

Input: Universal 120 - 277V AC 50/60 Hz

Dimming: Electronic Low Voltage (ELV): 100%-5%

0-10V: 100%-0%

Lutron Hi-Lume 1% Ecosystem Fade-to-Black option

Light Source: High output 3-step Mac Adam Ellipse COB

Rated life of 50,000 hours at L70

Mounting: Heavy gauge retention clips support trim firmly. Safety cabling standard.

Ceiling cut out (Round): Ø 5 1/8" Ceiling cut out (Square): 5 1/8" x 5 1/8" Accomodates 1/2"- 1" ceiling thickness

Finish: Electrostatically powder coated White, Black. Enamel coated Haze.

Plated and brushed copper Bronze.

Standards: ETL & cETL Wet location Listed

TRIMS (ORDER HOUSING SEPARATELY)

			Refere	nce Output*						
Model		Beam Angle	Lumens	Lumen/Watt	Color Temp		CRI	Finishes	Reflector/Trim	
57/2" ————————————————————————————————————	R4RWT Round	A Asym	1995	58	827 927 830	2700K 2700K 3000K	85 90 85	BK BKWT CB	Black Black/White Copper Bronze	
	R4SWT Square	A Asym	2405	71	930 835 840	3000K 3500K 4000K	90 85 85	HZ HZWT WT	Haze Haze/White White	

^{*}Reference output shows 830(85CRI 3000K) trim with 36 housing. Use multiplier table below to determine the output for other combinations.

Multiplier		TRIM								
		827	927	830	930	835	840			
	36	0.95	0.81	1.00	0.86	1.05	1.07			
HOUSING	25	0.66	0.56	0.69	0.59	0.73	0.74			
	15	0.43	0.37	0.45	0.39	0.48	0.49			

R4__WT-___-

Example: R4RWT-S827-WT

Please see next page for housing units(required)

waclighting.com Headquarters/Eastern Distribution Center Phone (800) 526.2588 44 Harbor Park Drive Fax (800) 526.2585 Port Washington, NY 11050 Central Distribution Center 1600 Distribution Ct Lithia Springs, GA 30122 Western Distribution Center 1750 Archibald Avenue Ontario, CA 91760

R4RWT, R4SWT

4.5" Volta - Wallwash Trim

WAC LIGHTING


Responsible Lighting®

HOUSINGS (REQUIRED)

		Model	Po	wer	Rating	Driver		Emergency Backup
Round New Construction 65/6" 1711/16" 223/16"	13½6"(EM option)	R4RNT Airtight R4RCT Airtight, Chicago Plenum	15 25 36	10W 15W 22W	IC rated IC rated Non-IC	DEFAULT L1	ELV, 0-10V Lutron Hi-Lume 1%	ЕМ
Square New Construction 65/8" 1711/16" 223/16"	13½6" (EM option)	R4SNT Airtight R4SCT Airtight, Chicago Plenum	15 25 36	10W 15W 22W	IC rated IC rated Non-IC	DEFAULT L1	ELV, 0-10V Lutron Hi-Lume 1%	ЕМ
134"	37/6" 24" I max	R4BRT Round or Square	15 25 36	10W 15W 22W	Non-IC Non-IC Non-IC	DEFAULT	ELV, 0-10V	N/A

Field Replaceable Driver

D-R4I	N-15	Driver for 15W New Construction Hsg
D-R4I	N-25	Driver for 23W New Construction Hsg
D-R4I	N-36	Driver for 34W New Construction Hsa

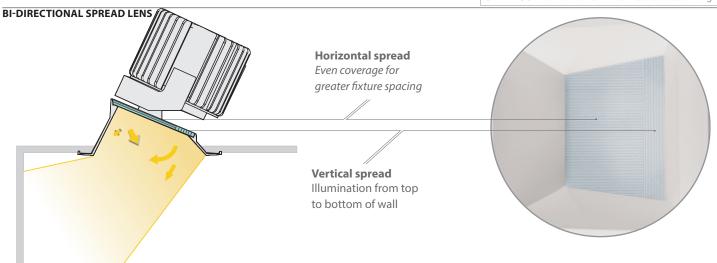

AVERAGE WALL ILLUMINANCE*

R4RWL-A830 10' CEILING		ON-CENTER SPACING					
		3	3'	4'			
		15W	14 fc	15W	11 fc		
DISTANCE FROM WALL	3'	23W 34W	22 fc 29 fc	23W 34W	17 fc 22 fc		
		15W	12 fc	15W	9 fc		
	4'	23W	18 fc	23W	14 fc		
		34W	25 fc	34W	19 fc		

R4SWL-A83	ON-CENTER SPACING					
10' CEILING	3	3'	4'			
DISTANCE	3'	15W 23W 34W	16 fc 24 fc 32 fc	15W 23W 34W	12 fc 18 fc 24 fc	
FROM WALL	4'	15W 23W 34W	14 fc 21 fc 28 fc	15W 23W 34W	11 fc 16 fc 21 fc	

*Results may vary depending on field conditions such as surface properties, ambient light levels, etc.

waclighting.com Phone (800) 526.2588 Fax (800) 526.2585 Headquarters/Eastern Distribution Center 44 Harbor Park Drive Port Washington, NY 11050 Central Distribution Center 1600 Distribution Ct Lithia Springs, GA 30122 Western Distribution Center 1750 Archibald Avenue Ontario, CA 91760