

# WAC LIGHTING

## STRUT

### Recessed Trimless Channels

Fixture Type: \_\_\_\_\_  
 Catalog Number: \_\_\_\_\_  
 Project: \_\_\_\_\_  
 Location: \_\_\_\_\_

#### ORDER NUMBER

System	Model	Length		Finish
S2	<b>CL04-FE</b>	4 ft Trimless Recessed Feed End	Required Power Feed Connected Power Unit Required	<b>BK</b> Black
	<b>CL08-FE</b>	8 ft Trimless Recessed Feed End		
	<b>CL12-FE</b>	12 ft Trimless Recessed Feed End		



Example: **S2CL04-FE-BK** Each section comes with two matching end caps and may be cut at end run.

System	Model	Length		Finish
S2	<b>CL01</b>	1 ft Trimless Recessed Channel	To extend channel runs after feed end	<b>BK</b> Black
	<b>CL01.5</b>	1.5 ft Trimless Recessed Channel		
	<b>CL04</b>	4 ft Trimless Recessed Channel		
	<b>CL06</b>	6 ft Trimless Recessed Channel		
	<b>CL08</b>	8 ft Trimless Recessed Channel		
	<b>CL12</b>	12 ft Trimless Recessed Channel		



Example: **S2CL08-BK** Each section comes with two matching end caps and may be cut at end run.

#### PRODUCT DESCRIPTION

The only lighting, power, and control system complete with lighting elements designed for discriminating performance. Configure STRUT for your retail, restaurant, commercial office, or residential lighting plan without custom lead times - get exactly what you want, when you want it.

#### FEATURES

- Heavy duty grade 48VDC trimless recessed channel with data bus.
- Operating Current: Max circuit is rated 12.5A
- Magnetic infrastructure allows you to slide elements within the STRUT and adjust lighting effects while powered
- Black copper busways for power and communications
- 5 Year warranty

#### SPECIFICATIONS


<b>Construction:</b>	Extruded aluminum with solid copper alloy bus bars
<b>Input:</b>	48 VDC
<b>Mounting:</b>	Recessed into drywall, Can be mounted on ceiling or wall vertically or horizontally
<b>Finish:</b>	Electrostatically Powder Coated Black
<b>Standards:</b>	UL, cUL, Dry Location Listed, IC

#### FINISHES



Black

#### LINE DRAWING

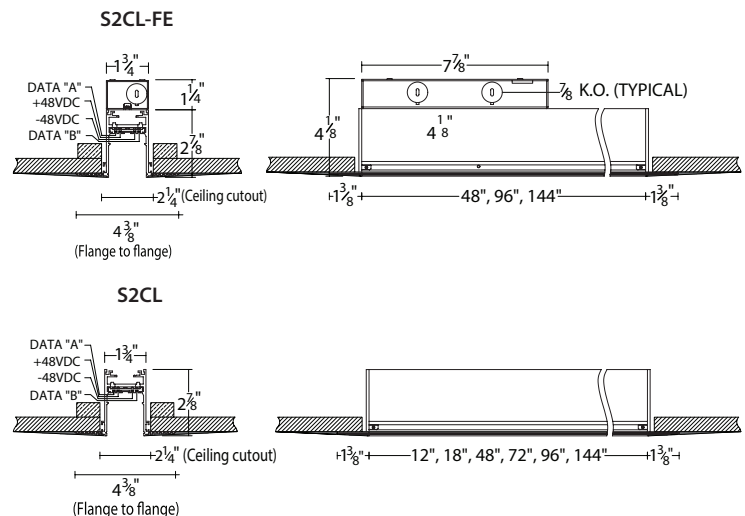

# WAC LIGHTING

## STRUT

### Recessed Trimless Channels

Fixture Type: \_\_\_\_\_  
 Catalog Number: \_\_\_\_\_  
 Project: \_\_\_\_\_  
 Location: \_\_\_\_\_

#### CHANNEL COVER

		Model	Finish	
	<b>Channel Cover 8ft</b> 8ft length may be field cut, Suitable for bottom channel coverage.	<b>S2C-COV08</b>	<b>BK</b> <b>WT</b>	<i>Black</i> <i>White</i>

Example: **S2C-COV08-BK**

#### CONNECTORS

	Accessories	Model	Finish	
	<b>Feed End Junction Box</b> 5in junction box with side and top knockouts. Includes BK and WT covers	<b>S2CL-FEB</b>		
	<b>I Connector with Feed</b> Feeds and joins two sections of channel with electrical continuity. Includes field cuttable 96" wire and conduit.	<b>S2CR-FI</b>	<b>BK</b>	<i>Black</i>
	<b>I Connector</b> Joins two sections of channel with electrical continuity	<b>S2CSR-I</b>	<b>BK</b>	<i>Black</i>
	<b>Dead I Connector</b> Joins two sections of channel without electrical continuity	<b>S2C-ID</b>	<b>BK</b>	<i>Black</i>
	<b>Below Bus Bar I Connector</b> Joins two sections of field cut channel with electrical continuity. Installs onto underside of channel bus bar for interrupted bus bar	<b>S2C-IB</b>	<b>BK</b>	<i>Black</i>
	<b>End Cap</b> Additional end cap	<b>S2CL-EC</b>	<b>BK</b>	<i>Black</i>
	<b>L Connector</b> Use to join two sections 90°. I connectors sold separately.	<b>S2CL-L</b>	<b>BK</b>	<i>Black</i>
	<b>T Connector</b> Use to join three sections. I connectors sold separately.	<b>S2CL-T</b>	<b>BK</b>	<i>Black</i>
	<b>X Connector</b> Use to join four channel sections. I connectors sold separately.	<b>S2CL-X</b>	<b>BK</b>	<i>Black</i>
	<b>Inside Corner</b> Joins ceiling to wall sections. I connectors sold separately.	<b>S2CL-IC</b>	<b>BK</b>	<i>Black</i>
	<b>Outside Corner</b> Joins wall to wall sections. I connectors sold separately.	<b>S2CL-OC</b>	<b>BK</b>	<i>Black</i>
	<b>Surface/Suspended to Recessed Corner</b> Joins suspended or surface mounted channel to recessed trimless channel. I connectors sold separately.	<b>S2CPSL-IC</b>	<b>BK</b> <b>BK</b> <b>WT</b> <b>BK</b>	<i>Black Surface/Suspended, Black Recessed</i> <i>White Surface/Suspended, Black Recessed</i>

Example: **S2CRS-I-BK**





# WAC LIGHTING

## STRUT

### Recessed Trimless Channels

Fixture Type: \_\_\_\_\_  
 Catalog Number: \_\_\_\_\_  
 Project: \_\_\_\_\_  
 Location: \_\_\_\_\_

#### SUSPENSION HARDWARE

	Accessories	Model	Finish	
	<b>Mount Clip</b> Support recessed channel with 1/4 - 20 threaded rod (rod by others)	<b>S2CR-CLIP</b>	<b>BK</b>	Black
	<b>Cable Suspension</b> Suspend channel from plenum ceiling. Includes 96in aircraft cable; may be field cut	<b>S2C-C96</b>	<b>BK</b> <b>NI</b>	Black Nickel
	<b>Stem Suspension</b> Suspend channel from plenum ceiling. Includes two 48in stem; may be field cut	<b>S2C-S96</b>	<b>BK</b> <b>WT</b>	Black White
	<b>Suspension Loop</b> Mechanical loop Supports up to 15 lb	<b>S2C-LOOP</b>	<b>BK</b>	Black

Example: **S2CR-CLIP-BK**

# WAC LIGHTING

## STRUT

### Recessed Trimless Channels

## BUILD IT

#### CHOOSE YOUR CHANNELS AND CONNECTORS

- Power feed from feed end channel or feed end junction box to energize your run.
- Support Strut with screws into rear blocking, 1/4"-20 tie rod (by others), or stem or aircraft cables to plenum ceiling. Minimum two supports per 4ft section. Minimum three supports per 6ft, 8ft and 12ft section.
- For patterns, choose L, T, X, or corners and I connector sold separately.

Note: STRUT is field cut at end of run or between channels using below bus bar connector S2C-IB-BK. For patterns and custom length channels, consult factory.

#### CHOOSE YOUR ELEMENTS

- Refer to element specifications to appropriately select elements.
- Total the wattage of the system.

#### CHOOSE YOUR CONNECTED POWER UNIT (CPU)

- Select remote mount CPU.
- Select appropriate wattage based on total system wattage.

Note: recommended sizing up as feasible for increased system capability.

#### ACCESSORIZE

- Add channel covers, lenses, or glare control accessories as desired.

A	S2CL08-FE	8FT FEED END RECESSED TRIMLESS CHANNEL	G	S2CL-OC	RECESSED TRIMLESS OUTSIDE CORNER
B	S2CL04	4FT RECESSED TRIMLESS CHANNEL	H	S2CR-CLIP	1/4"-20 TIE ROD MOUNTING CLIP
C	S2CL08	8FT RECESSED TRIMLESS CHANNEL	I	S2C-C96	CABLE SUSPENSION
D	S2CSR-I	I CONNECTOR	J	S2C-S96	STEM SUSPENSION
E	S2CL-IC	RECESSED TRIMLESS INSIDE CORNER	K	S2CPU-R600-S-BK	REMOTE CPU
F	S2CL-L	RECESSED TRIMLESS L CONNECTOR	L	BY OTHERS	FIELD WIRING TO CPU

