

# WAC LIGHTING

## VENTRIX

### Large Stealth Framing Projector - Fixed Beam

Fixture Type:

Catalog Number:

Project:

Location:

System	Model	Power	CRI	Color Temp	Beam	Lumens	CBCP	Finish			
S2	SP	2	20W	90	F927	2700K	55°	795	1375	BK WT	Black White
					F930	3000K	55°	840	1450		
					F935	3500K	55°	880	1520		
					F940	4000K	55°	905	1565		

Example: S2SP-2-F930BK

#### PRODUCT DESCRIPTION

A sophisticated option for lighting art and collectibles, the VENTRIX Stealth Framing Projector delivers performance-based direct accent lighting in upscale residential, art gallery, retail, hospitality and museum settings.


The sleek, stylish luminaire projects a square, rectangular or circular area of light with crisp lines to frame or highlight art objects, providing maximum visual impact. Like a quality camera lens, the innovative projector contains adjustable lenses as well as shims to frame a sharp accenting light the width and length of the object. Its fixed wide beam can frame large pieces of art.

The Stealth Framing Projector can also feature a gobo, a custom cut template, to shape the light in complex light patterns, custom logos, etc. to further enhance your lighting design.

#### FEATURES

- Precise, high definition wide projection
- Stealth armature with 360° horizontal rotation and 90° vertical aiming
- Accepts one glass or metal Gobo. Custom size by others:  
Outside Diameter: 24.5mm, Thickness: ≤ 1.5mm, Image Size: ≤ 19mm.
- To enable access to VENTRIX element releasing tabs, maintain at least 3" of free channel space
- Driver concealed within the fixture
- 5 year warranty

#### APPLICATION PERFORMANCE

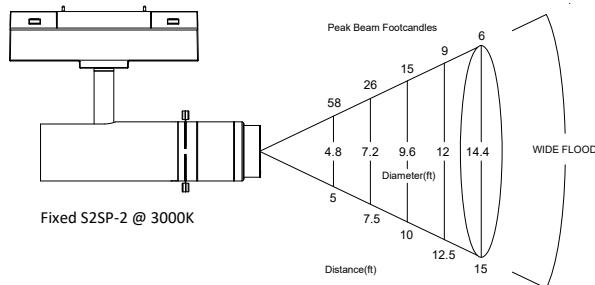

Distance (ft)	5	7.5	10	12.5	15
Maximum square projection using framing shims (ft)	3.4	5.1	6.8	8.5	10.2

Above guidelines represent straight on aiming angle. Results may vary. Mockup in site conditions recommended.


#### FINISHES



#### SPECIFICATIONS

<b>Construction:</b>	Die-cast aluminum with optical glass lenses
<b>Power:</b>	20W
<b>Input:</b>	48 VDC
<b>Dimming:</b>	ELV: 100-0.1% , TRIAC: 100-0.1%, 0-10V: 100-0.1%
<b>Light Source:</b>	Integrated LED, 3 Step Mac Adam Ellipse
<b>Rated Life:</b>	50000 Hours
<b>Mounting:</b>	Installs magnetically and mechanically into VENTRIX system, can be mounted on ceiling or wall vertically or horizontally
<b>Finish:</b>	Electrostatically Powder Coated and Anodized: Black, White
<b>Operating Temp:</b>	-4°F to 104°F (-20°C to 40°C)
<b>Standards:</b>	UL, cUL, Dry Location Listed

#### LINE DRAWING

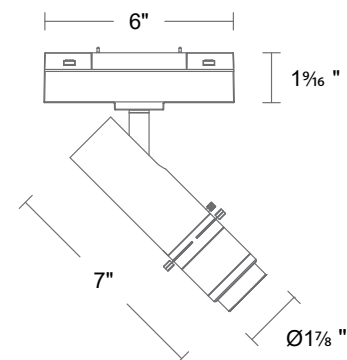

wacighting.com  
Phone (800) 526.2588  
Fax (800) 526.2585

Headquarters, East Manufacturing Facility  
44 Harbor Park Drive  
Port Washington, NY 11050

South East Manufacturing Facility  
1600 Distribution Ct  
Lithia Springs, GA 30122

Central Manufacturing Facility  
1700 South J Elmer Freeway, Ste 100  
Cedar Hill, TX 75104

West Manufacturing Facility  
1750 S Archibald Ave  
Ontario, CA 91761