

# WAC LIGHTING

## VENTRIX

### Large Stealth Framing Projector - Adjustable Beam

Fixture Type:

Catalog Number:

Project:

Location:

System	Model	Power	CRI	Color Temp	Beam	Lumens	CBCP	Finish			
S2	SP	2	20W	90	927	2700K	13°	330	8400	BK WT	Black White
						35°	565	2010			
					930	3000K	13°	355	8935		
						35°	605	2140			
					935	3500K	13°	370	9385		
						35°	635	2245			
					940	4000K	13°	380	9650		
						35°	650	2310			

Example: S2SP-2-930BK

#### PRODUCT DESCRIPTION

A sophisticated option for lighting art and collectibles, the VENTRIX Stealth Framing Projector delivers performance-based direct accent lighting in upscale residential, art gallery, retail, hospitality and museum settings.


The sleek, stylish luminaire projects a square, rectangular or circular area of light with crisp lines to frame or highlight art objects, providing maximum visual impact. Like a quality camera lens, the innovative projector contains adjustable lenses as well as shims to frame a sharp accenting light the width and length of the object. It can zoom-in for a closeup or zoom out to frame larger pieces of art.

The Stealth Framing Projector can also feature a gobo, a custom cut template, to shape the light in complex light patterns, custom logos, etc. to further enhance your lighting design.

#### FEATURES

- Precise, high definition zoomable projection
- Stealth armature with 360° horizontal rotation and 90° vertical aiming
- Accepts one glass or metal Gobo. Custom size by others:  
Outside Diameter: 24.5mm, Thickness: ≤ 1.5mm, Image Size: ≤ 19mm.
- To enable access to VENTRIX element releasing tabs, maintain at least 3" of free channel space
- Driver concealed within the fixture
- 5 year warranty

#### LINE DRAWING

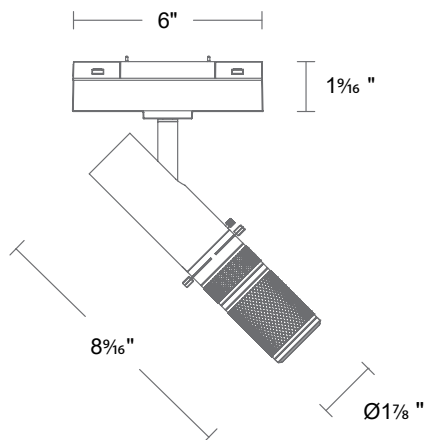

#### FINISHES



#### SPECIFICATIONS

<b>Construction:</b>	Die-cast aluminum with optical glass lenses
<b>Power:</b>	20W
<b>Input:</b>	48 VDC
<b>Dimming:</b>	ELV: 100-0.1%, TRIAC: 100-0.1%, 0-10V: 100-0.1%
<b>Light Source:</b>	Integrated LED, 3 Step Mac Adam Ellipse
<b>Rated Life:</b>	50000 Hours
<b>Mounting:</b>	Installs magnetically and mechanically into VENTRIX system, can be mounted on ceiling or wall vertically or horizontally
<b>Finish:</b>	Electrostatically Powder Coated and Anodized: Black, White
<b>Operating Temp:</b>	-4°F to 104°F (-20°C to 40°C)
<b>Standards:</b>	UL, cUL, Dry Location Listed

wacighting.com

Phone (800) 526.2588

Fax (800) 526.2585

Headquarters, East Manufacturing Facility

44 Harbor Park Drive

Port Washington, NY 11050

South East Manufacturing Facility

1600 Distribution Ct

Lithia Springs, GA 30122

Central Manufacturing Facility

1700 South J Elmer Freeway, Ste 100

Cedar Hill, TX 75104

West Manufacturing Facility

1750 S Archibald Ave

Ontario, CA 91761


Fixture Type:

Catalog Number:

Project:

Location:

APPLICATION PERFORMANCE

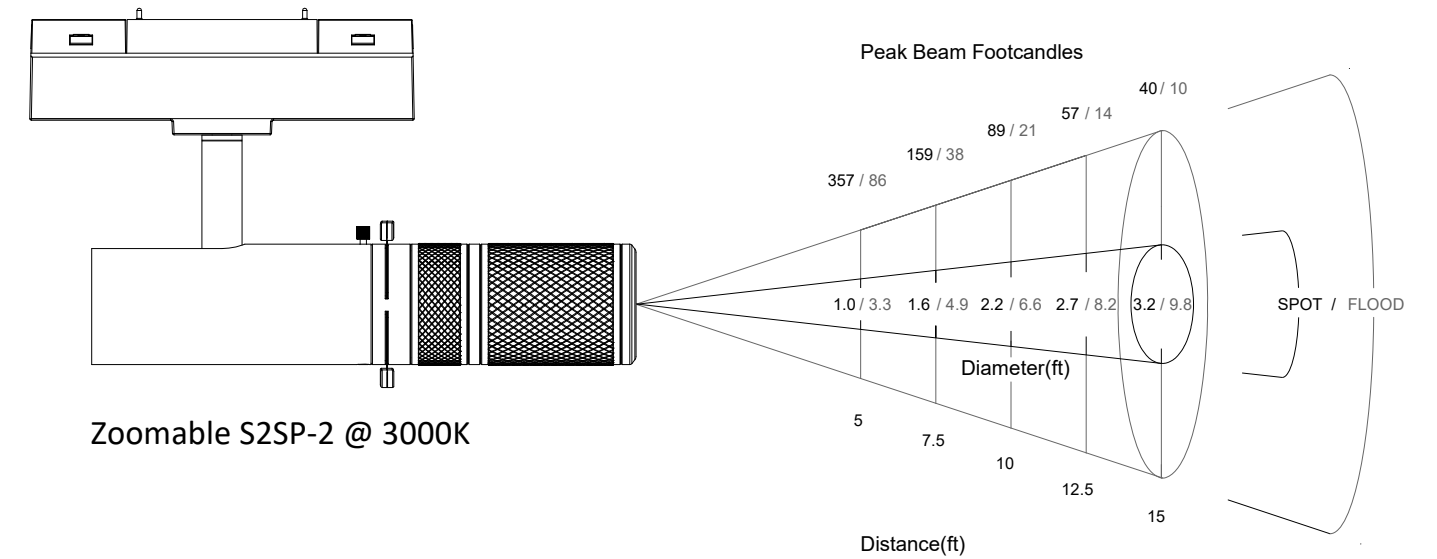

Distance (ft)	5	7.5	10	12.5	15
Maximum square projection using framing shims (ft)	2	3	4	5	6

Above guidelines represent straight on aiming angle. Results may vary.  
Mockup in site conditions recommended.