

WAC LIGHTING

KONSTRUKT

Stealth Framing Projector

Fixture Type: _____
 Catalog Number: _____
 Project: _____
 Location: _____

System	Model	Power	CRI	Color Temp	Beam	Lumens	CBCP	Finish	
S2	SP	1	10W	90	927	2700K	20°	340	BK Black WT White
						35°	330		
					930	3000K	20°	350	
						35°	345		
					935	3500K	20°	375	
						35°	365		
					940	4000K	20°	380	
						35°	375		

Example: **S2SP-1-930BK**

PRODUCT DESCRIPTION

A sophisticated option for lighting art and collectibles, the KONSTRUKT Stealth Framing Projector delivers performance-based direct accent lighting in upscale residential, art gallery, retail, hospitality and museum settings.


The sleek, stylish luminaire projects a square, rectangular or circular area of light with crisp lines to frame or highlight art objects, providing maximum visual impact. Like a quality camera lens, the innovative projector contains adjustable lenses as well as shims to frame a sharp accenting light the width and length of the object. It can zoom-in for a closeup or zoom out to frame larger pieces of art.

The Stealth Framing Projector can also feature a gobo, a custom cut template, to shape the light in complex light patterns, custom logos, etc. to further enhance your lighting design.

FEATURES

- Precise, high definition zoomable projection
- Stealth armature with 360° horizontal rotation and 90° vertical aiming
- Accepts one glass or metal Gobo. Custom size by others:
Outside Diameter: 19.5mm, Thickness: ≤ 2.5mm, Image Size: ≤ 14.5mm.
- To enable access to STRUT element releasing tabs, maintain at least 3" of free channel space
- Driver concealed within the fixture
- 5 year warranty

APPLICATION PERFORMANCE

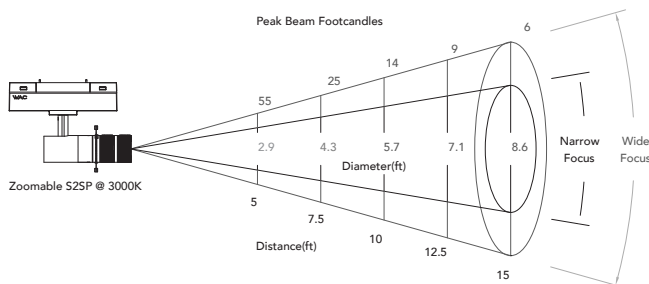

Distance (ft)	5	7.5	10	12.5	15
Maximum square projection using framing shims (ft)	2	3	4	5	6

Above guidelines represent straight on aiming angle. Results may vary. Mockup in site conditions recommended.

FINISHES



SPECIFICATIONS

- Construction:** Die-cast aluminum with optical glass lenses
- Power:** 10W
- Input:** 48 VDC
- Dimming:** ELV: 100-0.1% , TRIAC: 100-0.1%, 0-10V: 100-0.1%
- Light Source:** Integrated LED, 3 Step Mac Adam Ellipse
- Rated Life:** 50000 Hours
- Mounting:** Installs magnetically and mechanically into KONSTRUKT system, can be mounted on ceiling or wall vertically or horizontally
- Finish:** Electrostatically Powder Coated and Anodized: Black, White
- Operating Temp:** -4°F to 104°F (-20°C to 40°C)
- Standards:** UL, cUL, Dry Location Listed

LINE DRAWING

