
# **AETHER 3.5"** - Downlight Trim

### R3ARDT, R3ASDT



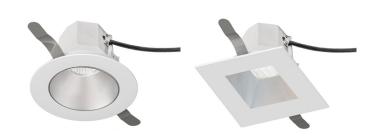

Fixture Type:	
Catalog Number:	
Project:	
Location:	

#### PRODUCT DESCRIPTION

Aether features all of the benefits of a high performance LED recessed downlight including Energy Star® Rating, Wet Location listing, and high output with efficiency. Available in a sleek trimless option which can be spackled directly up to the aperture. At 3.5″ in height, the Aether is designed with the difficult to fit jobs in mind.

#### **FEATURES**

- · Designed to fit in tight plenum
- · Wet location listed for trims
- 3.5" trim aperture, 3.5" housing height
- · 35° cut-off angle
- 5 year WAC Lighting product warranty

#### **SPECIFICATIONS**

**Construction:** Die-cast aluminum trim with extruded aluminum

heat sink

**Input:** Universal 120 - 277VAC, 50/60 Hz

**Power:** 15.5W, power factor 0.98 **Dimming:** 100% - 0% with 0-10V dimmer

100% - 5% with Electronic Low Voltage (ELV) dimmer

**Mounting:** Retention clips firmly hold trim to housing

Ceiling thickness: 1/2" - 11/2"

Finish: Electrostatically Powder Coated White, Black,

Enamel Coated Black/White, Haze/White

**Standards:** ETL & cETL Wet Location Listed, Title 24

JA8 Compliant, Energy Star 2.0

Trim (See next page for housing)	Model	Beam	Color	Temp	CRI	Lumens	CBCP	Finishes	
35/8" -33/8"- -51/4"	R3ARDT Round, Downlight Wet Location	<b>N</b> 25°	827 830 835 840	2700K 3000K 3500K 3500K 2700K	85 85 85 85	1130 1175 1210 1220	3515 3660 3740 3810	HZWT	Black Black/White Haze/White White
			930	3000K	90	980	3050		
		<b>F</b> 45°	827 927 830 930	2700K 2700K 3000K 3000K	85 90 85 90	1080 1130 1160 1175	1630 1695 1745 1765	BK BKWT HZWT	Black Black/White Haze/White
			835 840	3500K 4000K	85 85	900 940	1356 1410	WT	White
3 <sup>3</sup> / <sub>4</sub> "  —2 <sup>7</sup> / <sub>8</sub> " —  —5 <sup>1</sup> / <sub>4</sub> "	R3ASDT Square, Downlight Wet Location	<b>N</b> 25°	827 927 830 930	2700K 2700K 3000K 3000K	85 90 85 90	1130 1175 1210 1220	3515 3660 3740 3810	BK BKWT HZWT	Black Black/White Haze/White
			835 840	3500K 4000K	85 85	940 980	2930 3050	<b>WT</b> White	White
		<b>F</b> 45°	827 927 830 930	2700K 2700K 3000K 3000K	85 90 85 90	1080 1130 1160 1175	1630 1695 1745 1765	BK BKWT HZWT	Black Black/White Haze/White White
			835 840	3500K 4000K	85 85	900 940	1356 1410		

R3A\_DT-\_\_\_-

Example: R3ARDT-N930-HZWT


waclighting.com Phone (800) 526.2588 Fax (800) 526.2585 Headquarters, East Manufacturing Facility 44 Harbor Park Drive Port Washington, NY 11050

**South East Manufacturing Facility** 1600 Distribution Ct Lithia Springs, GA 30122 Central Manufacturing Facility 1700 South J Elmer Freeway, Ste 100 Cedar Hill, TX 75104 West Manufacturing Facility 1750 S Archibald Ave Ontario, CA 91761

# **AETHER 3.5"** - Downlight Trim

# Housings



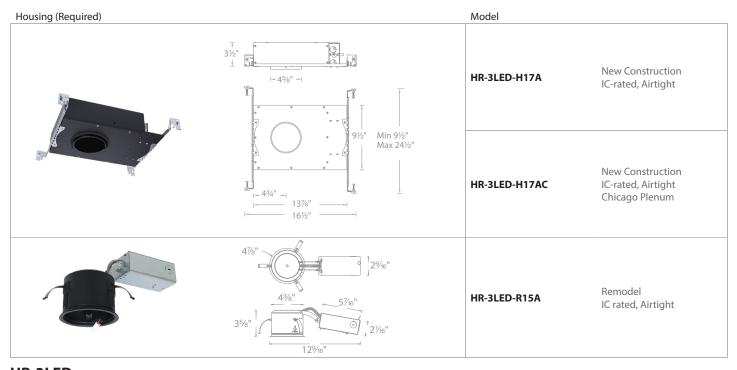

HR-3LED-\_\_\_\_ Example: HR-3LED-R15A