


# REFLEX – model: LED17

## LEDme® Track / Rail Luminaire

# WAC LIGHTING

Responsible Lighting®

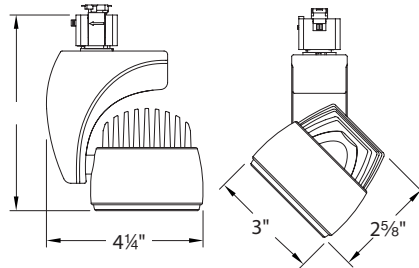

Fixture Type:

Catalog Number:

Project:

Location:

### PRODUCT DESCRIPTION

High performance and precise thermal management with robust die-cast construction makes this luminaire perfect for general, accent and wall wash applications in residential and commercial environments.

### FEATURES

- Accepts one lens/accessory
- Clear and Frosted Lens included
- 360° horizontal rotation and 180° vertical aiming
- Free of projected heat, UV and IR radiation
- Replaceable LED module (consult factory)
- 100,000 hour rated life
- 5 year WAC Lighting product warranty

### SPECIFICATIONS

**Construction:** Die-cast aluminum and clear lens.

**Finish:** Black (BK), Brushed Nickel (BN) and White (WT) powder coat paint.

**Driver:** 120VAC 50/60Hz, 700mA current. High power factor >0.9. Max Load: 17W.

**Dimming:** Dims to 10% with electronic low voltage (ELV) dimmer (120V only).

**Standards:** ETL & cETL Listed.

### FIXTURE PERFORMANCE

Model #	Beam	Voltage	Color Temp	Power	Lumens	Efficacy	CBCP	CRI
<b>LED17S-27</b>	20°	120V	2700K	17W	990	58 Lm/W	3440	85
<b>LED17F-27</b>	45°				910	54 Lm/W	1225	
<b>LED17S-30</b>	20°	120V	3000K	17W	990	58 Lm/W	3590	85
<b>LED17F-30</b>	45°				860	51 Lm/W	1145	
<b>LED17S-35</b>	20°	120V	3500K	17W	1025	60 Lm/W	3420	85
<b>LED17F-35</b>	45°				950	56 Lm/W	1280	
<b>LED17S-40</b>	20°	120V	4000K	17W	1125	66 Lm/W	3780	85
<b>LED17F-40</b>	45°				1035	61 Lm/W	1375	

### ORDER NUMBER

Track System	Model	Watt	Beam	Color Temp	Finish
<b>H</b> H	<b>LED17</b>	17W	<b>S</b> 20°	<b>27</b> 2700K	<b>BK</b> Black
<b>L</b> L				<b>30</b> 3000K	<b>BN</b> Brushed Nickel
<b>J</b> J/J2				<b>35</b> 3500K	<b>WT</b> White
				<b>40</b> 4000K	


### LENSES & ACCESSORIES

Model	Color	Model	Finish
<b>LENS-20</b> Color Lens	<b>AMB</b> Amber	<b>FR</b>	Frosted Lens
	<b>BLU</b> Blue		
	<b>GRN</b> Green		
	<b>RED</b> Red		
	<b>YEL</b> Yellow		
		<b>SPR</b>	Spread Lens
		<b>BEL</b>	Beam Elongating Lens



Example: H-LED17F-35-WT

### FINISHES



### REPLACEMENT MODULE

<b>RM-7X3-27</b>	2700K
<b>RM-7X3-30</b>	3000K
<b>RM-7X3-35</b>	3500K
<b>RM-7X3-40</b>	4000K

### WAC Lighting

www.waclighting.com  
Phone (800) 526.2588 • Fax (800) 526.2585


### Headquarters/Eastern Distribution Center

44 Harbor Park Drive • Port Washington, NY 11050  
Phone (516) 515.5000 • Fax (516) 515.5050

### Western Distribution Center

1750 Archibald Avenue • Ontario, CA 91760  
Phone (800) 526.2588 • Fax (800) 526.2585

20° Beam Angle

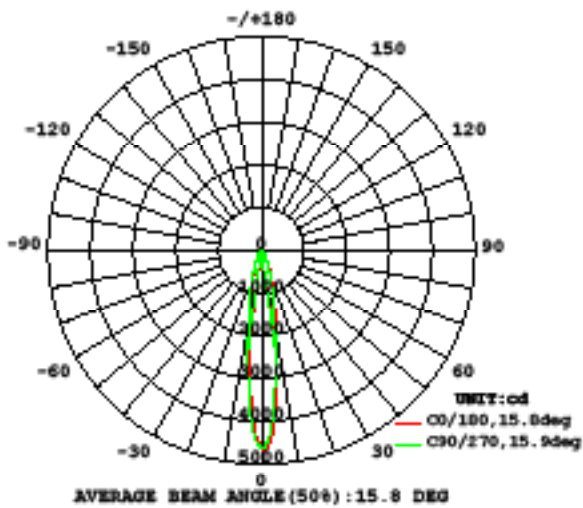

45° Beam Angle

