

WAC LIGHTING

2.5" Low Voltage

Downlight Trim

Model & Light Source	Lumens	Finish
HR-836 LED MR16 (Order separately)		BN Brushed Nickel
HR-836LED LED MR16 (Included)		CB Copper Bronze
		WT White

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Example: **HR-836-BN**

DESCRIPTION

Superb performance delivered in a small package. The 2.5" Low Voltage Recessed Downlight series offers smooth and crisp light for under cabinet and tight recessed spaces whereminiature apertures are desired. For use with HR-800 series low voltage housings. Accepts MR16 LED, housing and lamp are sold separately.

FEATURES


- Accommodates most LED MR16 lamps
- Retention clips secure lens firmly to lamp
- Clear lens included, replaceable lens options available
- 5 year warranty

SPECIFICATIONS

Construction:	20 gauge steel with die-cast aluminum baffle
Light Source:	LED MR16 (Order separately), LED MR16 (Included)
Finish:	Electrostatically Powder Coated:White, Electrostatically Powder Coated::Copper Bronze, Electrostatically Powder Coated::Brushed Nickel
Operating Temp:	-4°F to 104°F (-20°C to 40°C)
Standards:	UL, cUL, Damp Location Listed




FINISHES:



Brushed Nickel Copper Bronze White

LINE DRAWING:



WAC LIGHTING

2.5" Low Voltage

Non-IC Housing for Cabinet Use

Model

HR-800 2.5in Under Cabinet Remodel Housing

Example: **HR-800**

DESCRIPTION

Superb performance delivered in a small package. The 2.5" Low Voltage Recessed Downlight series offers smooth and crisp light for under cabinet and tight recessed spaces where miniature apertures are desired. May be used with any WAC compatible 2.5" HR-837, HR-834, or HR-836 trims.

FEATURES

- For cabinet use only
- Total depth of 4", one of the lowest profile recessed units available
- Low profile housing
- Transformer required
- 5 year warranty

SPECIFICATIONS

Construction:	20 gauge steel
Input:	12 VAC, 50/60Hz
Dimming:	ELV: %
Light Source:	Halogen MR16 (Sold Separately)
Mounting:	No screws, nails or hardware required. Flat "wing" springs expand against the cut out hole to hold fixture against the surface
Cut Out:	3"
Ceiling Thickness:	3/4"
Operating Temp:	-4°F to 104°F (-20°C to 40°C)
Standards:	UL, cUL, Damp Location Listed, Non IC

Fixture Type: _____


Catalog Number: _____

Project: _____

Location: _____



LINE DRAWING:



WAC LIGHTING

2.5" Low Voltage

Remodel Non-IC Housing Non-IC

Model & Product

HR-801 2.5in Low Voltage Remodel Non-IC Housing

Example: **HR-801**

DESCRIPTION

Superb performance delivered in a small package. The 2.5" Low Voltage Recessed Downlight series offers smooth and crisp light for under cabinet and tight recessed spaces where miniature apertures are desired. May be used with any WAC compatible 2.5" HR-837, HR-834, or HR-836 trims.

FEATURES

- Integral Electronic Transformer
- Advanced auto-reset, soft start and short circuit protection
- 3" clearance on all sides when insulation is present
- Suitable for chain wiring
- J-box and transformer accessible through ceiling opening
- Transformer included
- 5 year warranty

SPECIFICATIONS

Construction:	20 gauge steel
Power:	50W
Input:	120 VAC, 50/60Hz
Dimming:	ELV: 100-10%
Light Source:	Halogen MR16 (Sold Separately)
Mounting:	No screws, nails or hardware required. Flat "wing" springs expand against the cut out hole to hold fixture against the surface
Cut Out:	3"
Ceiling Thickness:	3/4"
Operating Temp:	-4°F to 104°F (-20°C to 40°C)
Standards:	UL, cUL, Damp Location Listed, Non IC

Fixture Type: _____


Catalog Number: _____

Project: _____

Location: _____



LINE DRAWING:

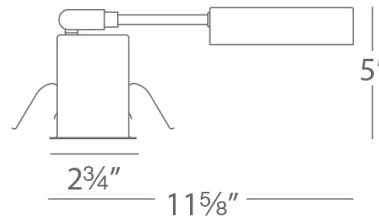

WAC LIGHTING

2.5" Low Voltage

New Construction Non-IC Housing

Model & Product

HR-802 2.5in Low Voltage New Construction Non-IC Housing

Example: **HR-802**

DESCRIPTION

Superb performance delivered in a small package. The 2.5" Low Voltage Recessed Downlight series offers smooth and crisp light for under cabinet and tight recessed spaces where miniature apertures are desired. May be used with any WAC compatible 2.5" HR-837, HR-834, or HR-836 trims.

FEATURES

- 3" clearance on all sides when insulation is present
- Total depth of 4", one of the lowest profile recessed units available
- Low profile housing
- Transformer included
- 5 year warranty

SPECIFICATIONS

Construction:	20 gauge steel
Power:	50W
Input:	120 VAC, 50/60Hz
Dimming:	ELV: 100-10%
Light Source:	Halogen MR16
Mounting:	Supplied with hanger bars, adjustable from 15"-242" to accommodate various joist construction and grid sizes.
Cut Out:	3"
Ceiling Thickness:	3/4"
Operating Temp:	-4°F to 104°F (-20°C to 40°C)
Standards:	UL, cUL, Damp Location Listed, Non IC

Fixture Type: _____


Catalog Number: _____

Project: _____

Location: _____



LINE DRAWING:



WAC LIGHTING

2.5" Low Voltage Downlight Trim







Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

ACCESSORIES

	<i>Model</i>	<i>Description</i>	<i>Finish</i>
	LENS-16-RED LENS-16-GRN LENS-16-BLU LENS-16-AMB	Colored Lens Colored Lens Colored Lens Colored Lens	Red Green Blue Amber
	LENS-16-FR	Clear/Frosted Lens	Frosted
	LENS-16-SPR	Spread Lens	Spread Lens
	LENS-16-UVF	UV Filter lens	Clear
	LENS-16-BEL	Beam Elongating Lens	Beam Elongating
	LENS-16-HCL	Honeycomb Louver	Black