


LANDSCAPE LIGHTING

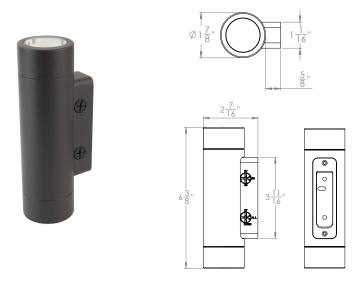

Project:	
Catalog Number	:
Fixture Type:	

Location:

PRODUCT DESCRIPTION

Landscape 12V wall mount cylinder up and down light with 3 CCT selection and adjustable beam angles.

FEATURES

- Continuously Adjustable Beam Angles. Indexed at 35°, 45°, 55°
- IP66 rated, Protected against high-pressure water jets
- · Corrosion resistant aluminum
- Factory sealed water tight fixtures
- Constant output for 9V-15V input
- Can be used as an uplight or downlight or both
- 2700K/3000K/4000K selectable
- 10' lead wire and direct burial gel filled wire nuts included
- MLV dimmable with remote MLV dimmers


SPECIFICATIONS

Input: 9 -15VAC

Power: 7.5W / 9.0VA (Use VA value for sizing the transformer

and calculate voltage drop.)

Brightness: 325 Im per light
Beam Angle: 35° to 55°
CRI: 85
Rated Life: 50,000 hours



Select Up Light, Down Light or Both

ORDERING NUMBER

		Color Temp		Finish	
3611	12V	27 30 40	2700K Warm White or 3000K Pure White or 4000K Cool White	BK BZ WT	Black on Aluminum Bronze on Aluminum White on Aluminum

3611-27/30/40

Example: 3611-27/30/40BZ



Continuously Adjustable Beam Angl



Select Warm White, Pure White, or Cool White (2700K, 3000K or 4000K)

AUG 2024

1

CYLINDER WALL MOUNT 12V

3611



Accessories

Optics



LENS-11-AMB Amber LENS-11-BLU LENS-11-GRN LENS-11-RED

Green Red

LENS-11-RF

Frosted

Enhances saturation of florals and foliage

Magnetic Transformers

Stainless Steel, 12-15V output, IP65 rated, UL 1838 listed See transformer spec sheet for details and its accessories

9075-TRN-SS 75W Max

9150-TRN-SS 150W Max

9300-TRN-SS 300W Max

9600-TRN-SS 600W Max

