


HR-LED431

4" LEDme Lensed Trim

WAC LIGHTING

Responsible Lighting®

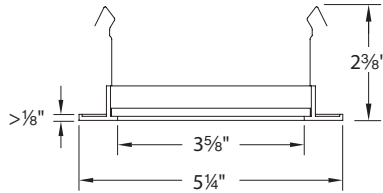

Fixture Type:

Catalog Number:

Project: _____

Location: _____

PRODUCT DESCRIPTION

Round recessed lensed trim with interior woven lens.
For use with HR-LED418 series housings.

FEATURES

- Less than 1/8" thick, super low profile die-cast aluminum trim
- Recessed depth from LEDs to trim edge is 2 3/8"
- Narrow flood beam spread
- Woven lens creates comfortable diffused light at any angle
- Handles surfaces up to 3/4" thick
- 5 year WAC Lighting product warranty

SPECIFICATIONS

Construction: Durable die-cast aluminum construction.
Three heavy gauge retention clips firmly hold trim to housing.

Light Source: Utilizes six 3W LED's (included with housing).
See individual housing for wattage rating.

Finish: Powder coat paint or plated metal finish.
Available in Chrome (CH) and White (WT).

Standards: UL Listed for damp locations.

ORDER NUMBER

Model #	Finish	Trim
HR-LED431	CH	Chrome
	WT	White

FINISHES


CH



WT



PHOTOMETRY



Beam Angle: 31.4°

HR-LED431 -

Example: **HR-LED431-WT**

COMPATIBLE HOUSINGS (ORDER SEPARATELY)

Rating	Model #	Installation	Color Temp	Watt	Lumens	CRI	Input	Current	Dimensions	Cutout
IC-Rated	HR-LED418-NIC	<i>New Construction</i>	27 2700K	10.2W	639	85	120V 50/60Hz	450mA	L: 14½-24½" W: 6¾" H: 5½"	4¾"
			30 3000K		639	85				
	HR-LED418-RIC	<i>Remodel</i>	35 3500K		681	80				
			40 4000K		815	75				
Non-IC	HR-LED418-N	<i>New Construction</i>	27 2700K	16W	846	85	120V 50/60Hz	700mA	L: 14½-24½" W: 6¾" H: 5½"	4¾"
			30 3000K		846	85				
	HR-LED418-R	<i>Remodel</i>	35 3500K		901	80				
			40 4000K		1135	75				
Non-IC	HR-LED418-N	<i>New Construction Emergency Backup Battery</i>	27 2700K	EM 16W	846	85	120V 50/60Hz	700mA	L: 14½-24½" W: 11½" H: 5½"	4¾"
		30 3000K	846		85					
		35 3500K	901		80					
		40 4000K	1135		75					

Example: **HR-LED418-NIC-27** or **HR-LED418-NIC-27-EM**

See individual housing spec sheets for complete information.

WAC Lighting
www.waclighting.com
Phone (800) 526.2588 • Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive • Port Washington, NY 11050
Phone (516) 515.5000 • Fax (516) 515.5050

Western Distribution Center
1750 Archibald Avenue • Ontario, CA 91760
Phone (800) 526.2588 • Fax (800) 526.2585